




Set using ISO screws

# TFM-8600W

*General Export Model  
USA Model*

**REVISED**

Do not use TFM-8600W  
SERVICE MANUAL  
(USA Model, 110508-2)  
previously issued for sets  
with serial number 13501  
and later.

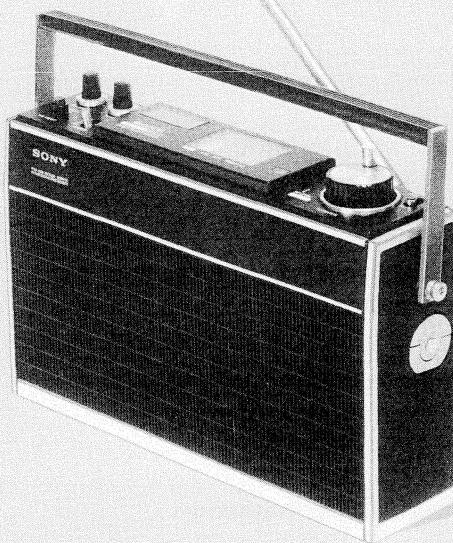

## SPECIFICATIONS

Circuit:	1-FET 18-transistor 9-diode super-heterodyne, 4-transistors for auxiliary circuit	Power Output	at 10 % distortion: 1.2 W maximum: 1.8 W
Frequency Ranges:	FM 87.5 ~ 108 MHz (3.42 ~ 2.78 m) AIR 108 ~ 136 MHz (2.77 ~ 2.20 m) MW 530 ~ 1,605 kHz (566 ~ 187 m) BEACON 150 ~ 400 kHz (2,000 ~ 750 m)	Current Drain	at zero signal: FM/AIR 36 mA, MW/BEACON 27 mA at 10 % distortion: 400 mA
Intermediate Frequencies:	FM/AIR 10.7 MHz MW/BEACON 455 kHz	Power Requirements:	Four "D" size flashlight batteries 6 V in total Car battery with SONY car battery cord DCC-126 (option) AC 120 V 50/60 Hz with ac adaptor AC-70W
Antennas:	FM/AIR built-in telescopic antenna or external antenna MW/BEACON built-in ferrite bar antenna or external antenna	Speaker:	10 cm (4") dia. 8 Ω
Sensitivity at 50 mW output:	FM 2.5 μV (8 dB) at S/N 30 dB AIR 1.6 μV (4 dB) MW 32 μV/m (30 dB/m) BEACON 56 μV/m (35 dB/m)	Dimensions:	252 mm (W) x 162 mm (D) x 72 mm (H) (10" (W) x 6 3/8" (D) x 2 7/8" (H))
Selectivity at ± 10 kHz off-resonance:	34 dB at 1,400 kHz	Weight:	1.9 kg (4 lb 3 oz)

**SONY®**  
**SERVICE MANUAL**

## TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
	Specifications . . . . .	1
<b>1. OUTLINE</b>		
1-1.	Technical Features . . . . .	3
1-2.	Circuit Description . . . . .	3
1-3.	Block Diagram . . . . .	5
<b>2. DISASSEMBLY</b>		
2-1.	Rear Cabinet Removal . . . . .	6
2-2.	Chassis Removal . . . . .	6
2-3.	Main (cp/i-f/af) Circuit Board Removal . . . . .	6
2-4.	Air Circuit Board Removal . . . . .	7
2-5.	Fm Front End Block and Printed Circuit Board Removals . . . . .	8
2-6.	Band Indicator Cord Stringing . . . . .	8
2-7.	Dial Cord Stringing . . . . .	9
<b>3. CIRCUIT ADJUSTMENTS</b>		
3-1.	A-m I-f Alignment . . . . .	11
3-2.	Fm/Air I-f Alignment . . . . .	11
3-3.	Frequency Coverage and Tracking Adjustment . . . . .	14
<b>4. SCHEMATIC AND MOUNTING DIAGRAMS</b>		
4-1.	Schematic Diagram . . . . .	17
4-2.	Fm Front End Circuit Board (P1) – Conductor Side – . . . . .	19
4-3.	Air Bandpass Filter Circuit Board (P4) – Conductor Side – . . . . .	19
4-4.	Air Front End Circuit Board (P2) – Conductor Side – . . . . .	20
4-5.	Main Circuit Board (P3) – Conductor Side – . . . . .	21
<b>5. PACKING AND EXPLODED VIEWS</b>		
5-1.	Packing . . . . .	23
5-2.	Exploded View (1) – Cabinet Ass'y – . . . . .	24
5-3.	Exploded View (2) . . . . .	25
<b>6. ELECTRICAL PARTS LIST</b>		27

# SECTION 1

## OUTLINE

### 1-1. TECHNICAL FEATURES

- \* High-performance portable radio receiver with four bands; AIR, FM, MW, and BEACON.
- \* Separate AIR band circuit with a ceramic filter and four high-Q i-f transformers for superior sensitivity and selectivity.
- \* Squelch circuit for AIR band reception.
- \* FET (field effect transistor) with triple-tuned passive input circuit for superior interference rejection.
- \* Useful as an a-m band direction finder.

### 1-2. CIRCUIT DESCRIPTION

#### Stage/Control

##### Fm Front End

*FET mixer*  
Q101

Usually an fm front end consists of an rf amplifier, mixer and local oscillator as shown in Fig. 1-1. The rf amplifier sometimes worsens the crossmodulation-ability of the receiver when ordinary bipolar transistors are used. It is, however, difficult to eliminate the rf amplifier because its removal causes strong suprious radiation, poor sensitivity and a poor noise figure. To solve this problem, the Model TFM-8600W uses a low-noise junction FET for the mixer and a triple-tuned circuit for a passive input circuit as shown in Fig. 1-2. The Model TFM-8600W is capable of clear fm reception even in strong signal-strength areas due to the extremely superior interference-rejection characteristics of the passive input circuit.

*Local oscillator*  
Q102

The oscillator generates a frequency 10.7 MHz higher than the incoming signal frequency and injects the generated voltage at the source of FET mixer Q101.

#### Stage/Control

*Afc diode*  
D101

This diode is connected across the resonant circuit of the oscillator and works as a variable-capacitance diode. A dc feedback voltage from the discriminator controls the bias applied to the diode to keep the local oscillator frequency correct.

*Fm i-f amplifier*  
Q103

Transistor Q103 amplifies the 10.7 MHz i-f signal produced by mixer Q101 and coupled to it through i-f transformer IFT F101.

#### Stage/Control

##### Agc amplifier

Q216

#### Stage/Control

*Temperature compensator*  
D301

Diode D301 compensates the frequency drift of the local oscillator caused by temperature variations.

*I-f amplifier*  
Q213 to Q215

This 10.7 MHz i-f amplifier consists of three stages coupled by i-f transformers and a ceramic filter.

*Detector D206*

Diode D206 rectifies the i-f signal and converts it into an audio signal.

*Agc amplifier*  
Q216

This stage amplifies a dc voltage from detector D206 and applies it to the bases of Q213 and Q214 as an agc voltage. Transistor Q216 also applies the dc voltage to the base of Q217 as a squelch control voltage.

*Squelch circuit*  
Q217

When the receiver is tuned to a signal, the dc output voltage from detector D206 decreases the collector current flow of pnp transistor Q216. This decreases the collector voltage of Q216. The base-emitter bias of Q217 (pnp) therefore increases, enabling Q217 to pass the detected signals.

When detuned from a signal, the collector current of Q216 in-

#### Function

##### Fm Front End

*FET mixer*  
Q101

Usually an fm front end consists of an rf amplifier, mixer and local oscillator as shown in Fig. 1-1. The rf amplifier sometimes worsens the crossmodulation-ability of the receiver when ordinary bipolar transistors are used. It is, however, difficult to eliminate the rf amplifier because its removal causes strong suprious radiation, poor sensitivity and a poor noise figure. To solve this problem, the Model TFM-8600W uses a low-noise junction FET for the mixer and a triple-tuned circuit for a passive input circuit as shown in Fig. 1-2. The Model TFM-8600W is capable of clear fm reception even in strong signal-strength areas due to the extremely superior interference-rejection characteristics of the passive input circuit.

The oscillator generates a frequency 10.7 MHz higher than the incoming signal frequency and injects the generated voltage at the source of FET mixer Q101.

#### Function

##### Agc amplifier

Q216

#### Function

##### Agc amplifier

Q216

#### Function

*Rf amplifier*  
Q301

Q301 amplifies the VHF a-m signals coupled through bandpass filter L301. This amplifier uses a common-base circuit for best high-frequency response.

*Converter*  
Q302

Q302 generates a frequency 10.7 MHz higher than the incoming signal frequency and mixes it with the incoming signal for conversion to the 10.7 MHz i-f.

#### Function

*Rf amplifier*  
Q301

*Converter*  
Q302

#### Function

*Rf amplifier*  
Q301

## &lt;h

## SECTION 2 DISASSEMBLY

### 1-3. BLOCK DIAGRAM

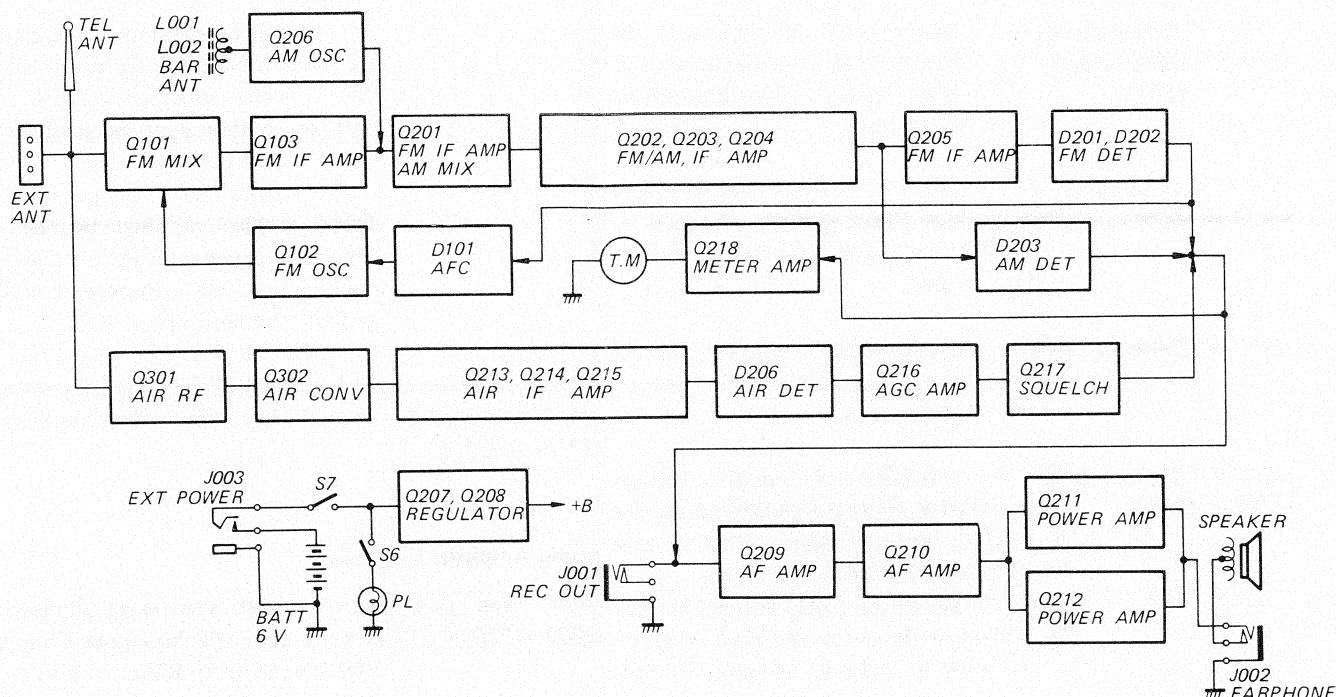


Fig. 1-3.

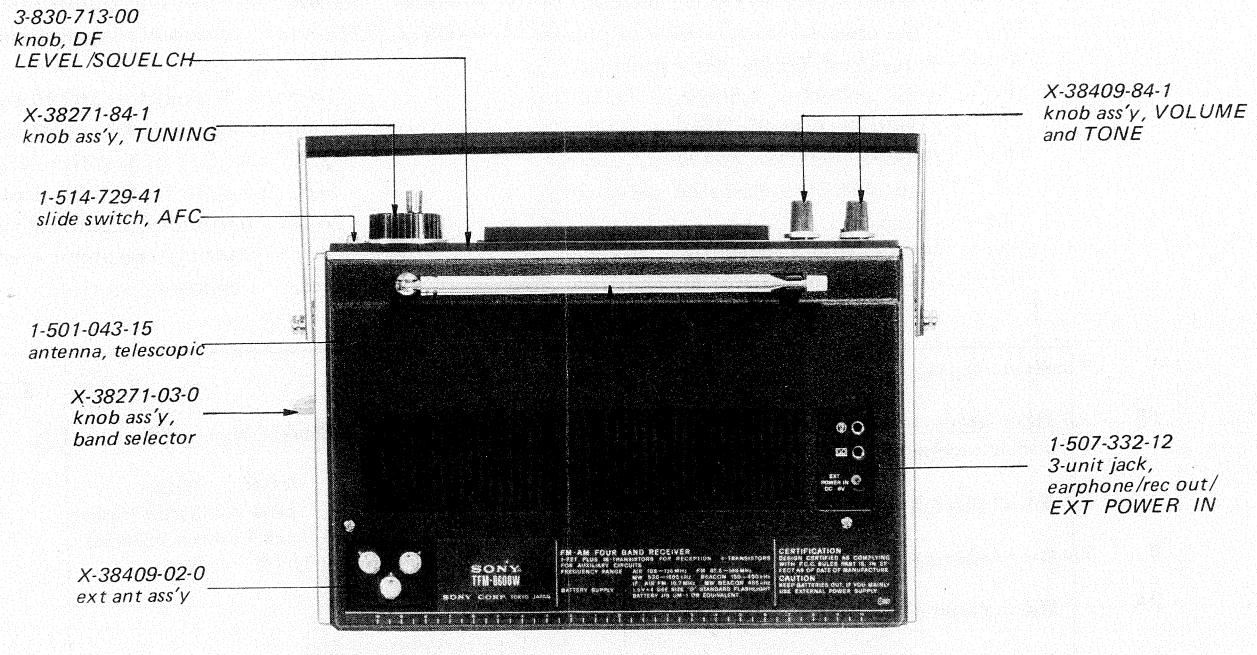


Fig. 1-4.

### 2-1. REAR CABINET REMOVAL

1. Remove the three screws shown in Fig. 2-1.
2. Remove the ornamental screw and pull out the band selector knob.
3. Pull out the VOLUME, TONE and TUNING knobs.
4. Remove the rear cabinet in the direction shown by the arrow and pull out the antenna lead-pin from the terminal.

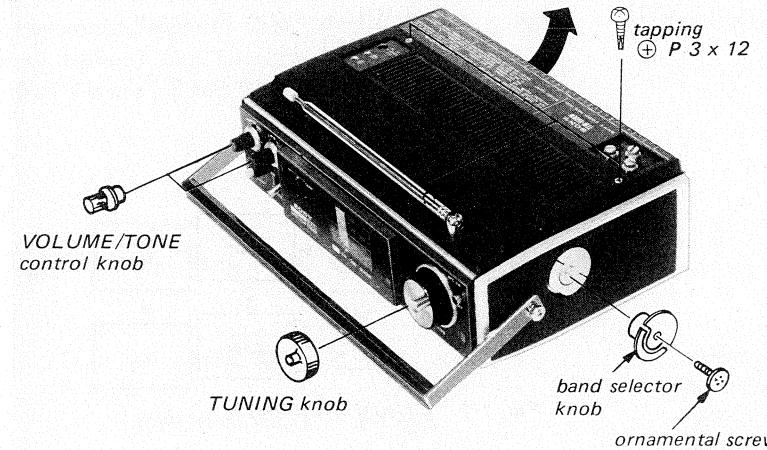


Fig. 2-1.

### 2-2. CHASSIS REMOVAL

1. Remove the rear cabinet as outlined in 2-1 above and follow the removing steps numerically as shown below.

\* Note: TUNING meter is attached to the front cabinet with an adhesive tape. Remove chassis by breaking the adhesive tape.

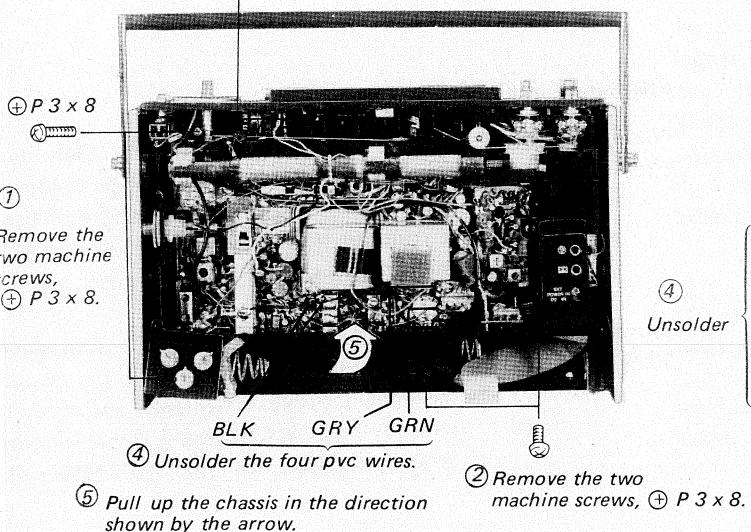


Fig. 2-2

### 2-3. MAIN (CP/I-F/AF) CIRCUIT BOARD REMOVAL

1. Remove the chassis as outlined in 2-2 above and follow the removing steps numerically as shown below.

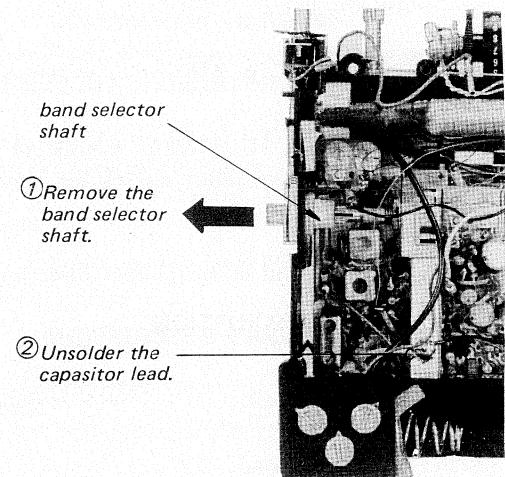


Fig. 2-3.

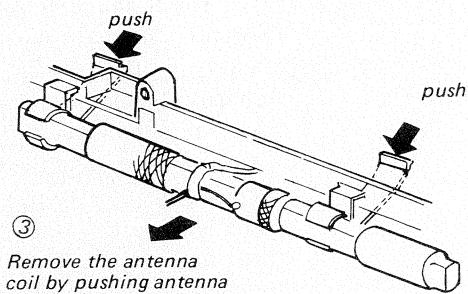


Fig. 2-4.

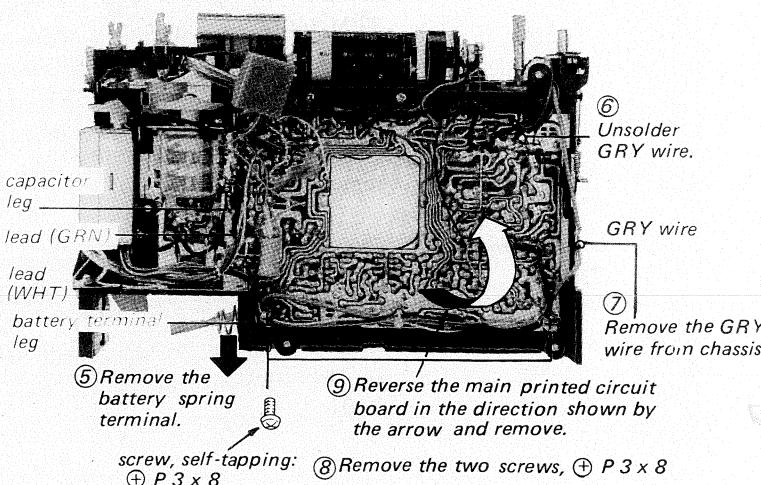


Fig. 2-5

**2-4. AIR CIRCUIT BOARD REMOVAL**

1. Remove the chassis as outlined in 2-2 above and follow the removing steps numerically as shown below.

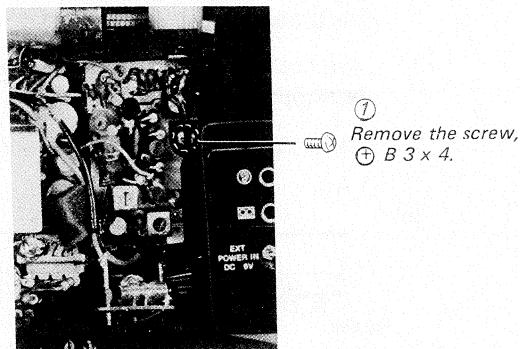


Fig. 2-6.

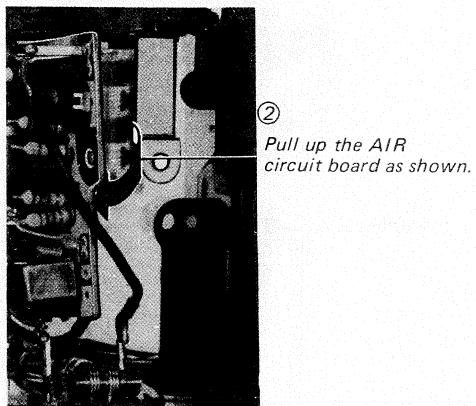


Fig. 2-7.

## 2-5. FM FRONT END BLOCK AND PRINTED CIRCUIT BOARD REMOVALS

1. Remove the chassis as outlined in 2-2 above and follow the removing steps as shown below.

**Note:** Inside check to the FM front end block can be performed with steps ② and ③

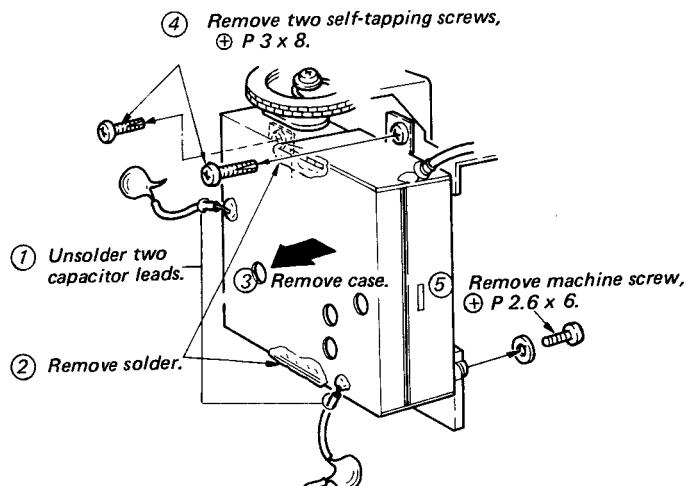


Fig. 2-8.

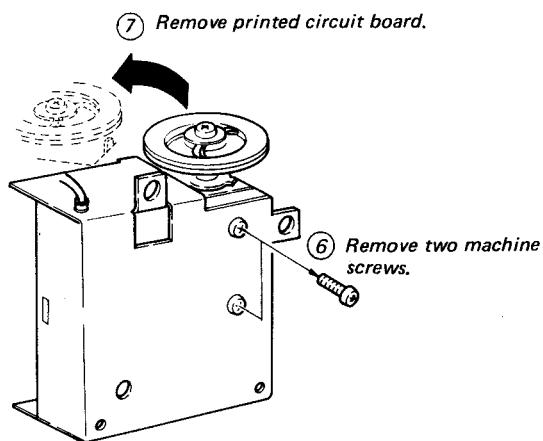


Fig. 2-9.

## 2-6. BAND INDICATOR CORD STRINGING

1. Fix the cord to the spring as shown in Fig. 2-10 (a).
2. Rotate the band selector drum fully counter-clockwise.
3. Rotate the band indicator drum so that it shows BCN on the top.
4. String the cord as shown in Fig. 2-10 (b).

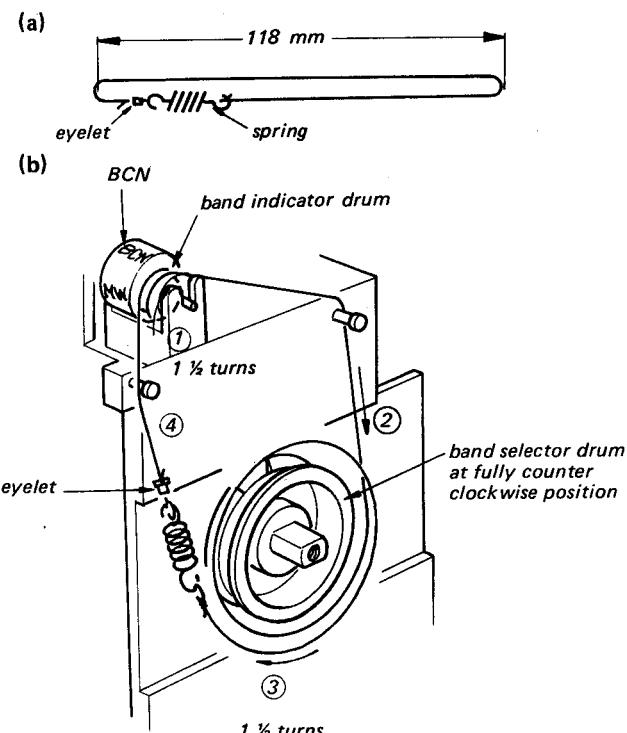


Fig. 2-10.

## 2-7. DIAL CORD STRINGING

1. Make a dial cord assembly as shown in Fig. 2-11 (a) and apply a small amount of lock paint to the knotted portions.
2. String the cord as shown in Fig. 2-11 (b).
3. Set the tuning shaft to fully clockwise position and adjust the film drum position with a phillips screwdriver as shown in Fig. 2-11 (c) so that the logging scale "10" on the dial film
4. places 5 mm above the hairline mark on the dial film holder as shown in Fig. 2-11 (d).
5. Hang the dial cord on the claw of the film drum as shown with \* in Fig. 2-11 (c).
- Set the chassis back into the cabinet and set the tuning shaft at fully counterclockwise position and check that the orange line on the dial transparent plate is at the mark "0" on the dial film as shown in Fig. 2-11 (e).

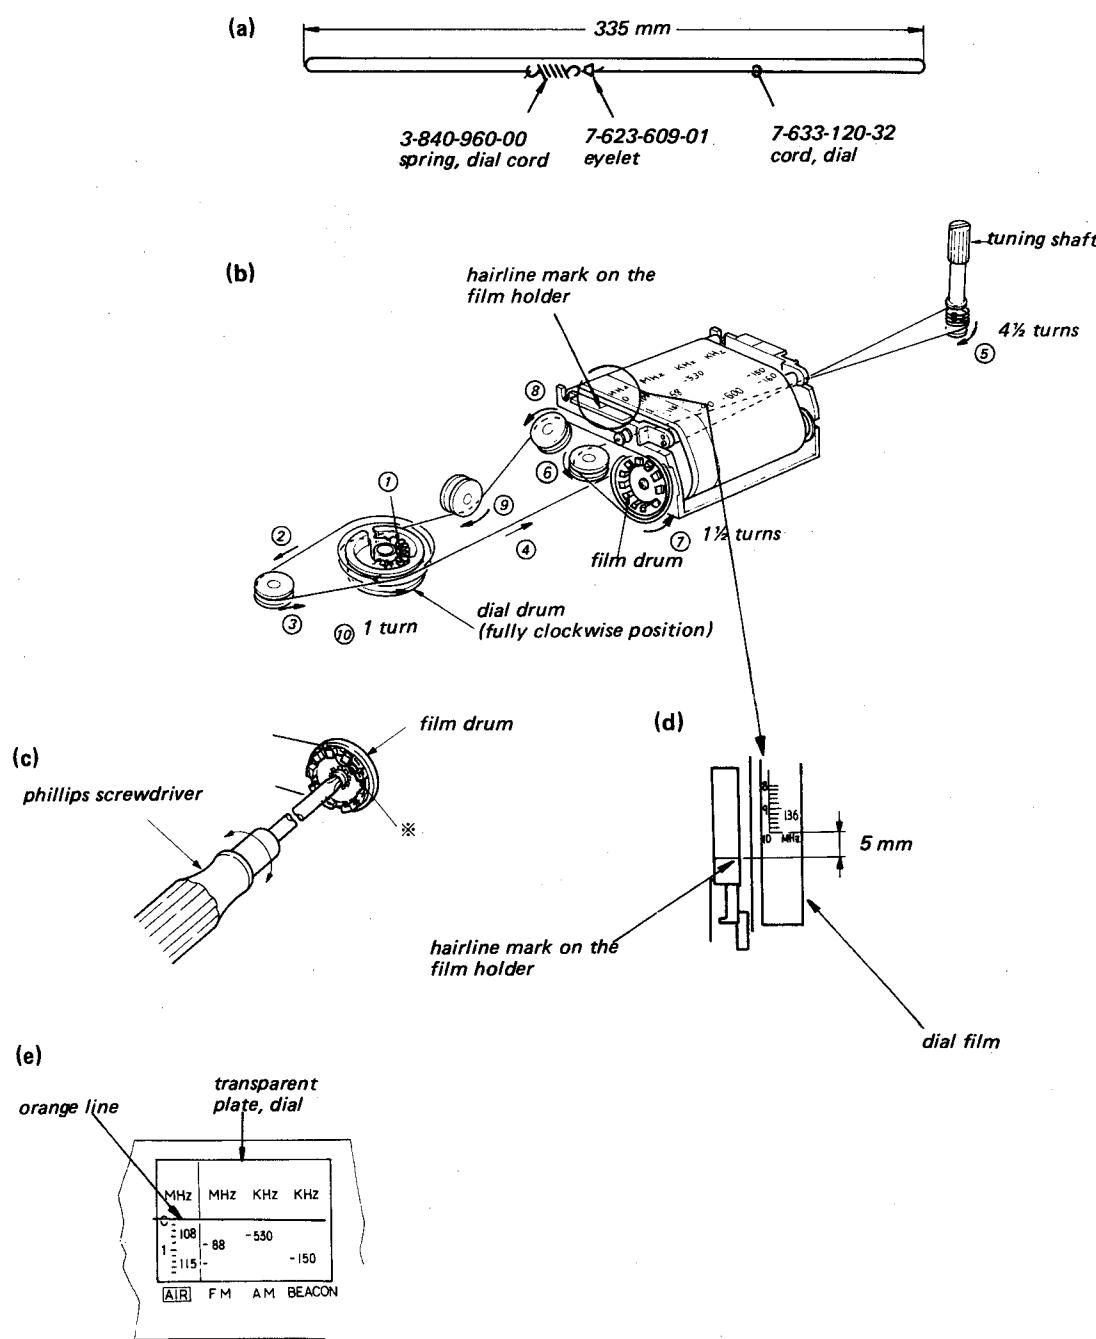


Fig. 2-11.

## MEMO

### SECTION 3 CIRCUIT ADJUSTMENTS

#### 3-1. AM I-F ALIGNMENT

Test Equipment/Tools Required:

- \* Rf signal generator (for AM)
- \* Multimeter (20 kΩ/V DC)
- \* Loop antenna
- \* 8 Ω resistor
- \* Screwdriver for alignment

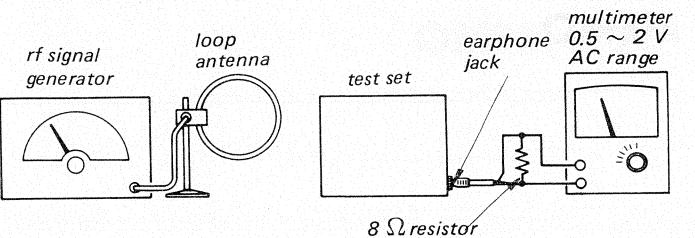


Fig. 3-1. AM (MW/BEACON) i-f alignment, frequency coverage and tracking adjustment setup.

Rf Signal Generator Coupling	Rf Signal Generator Frequency	Multimeter Connection	Adjust	Remarks
Loop antenna See Fig. 3-1.	455 kHz (1 kHz 30% AM)	Earphone jack with 8 Ω load resistor in parallel	CFT	Band selector : MW VOLUME control: fully clockwise (MAX) TONE control : fully clockwise (H) TUNING knob : fully clockwise Adjust for maximum meter reading.

#### 3-2. FM/AIR I-F ALIGNMENT

Test Equipment/Tools Required:

- \* Rf signal generator (for FM)
- \* Multimeter (20 kΩ/V DC)
- \* 8 Ω resistor
- \* Screwdriver for alignment

##### Preparation:

FM rf signal generator modulation:  
400 Hz, ± 22.5 kHz deviation

FM rf signal generator output level:  
Usable lowest possible

FM rf signal generator coupling:  
Direct connection to FM tuning  
capacitor (for FM) or FM/AIR  
external antenna terminals (for AIR).  
See Fig. 3-3 and 3-7.

VOLUME control setting: fully clockwise (MAX)  
TONE control setting: fully clockwise (H)  
AFC switch setting: OFF

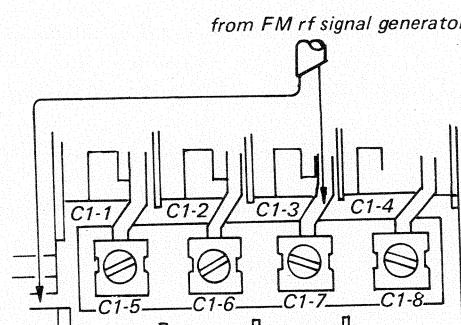


Fig. 3-3. FM rf signal generator coupling for FM i-f alignment.

##### Test Setup:

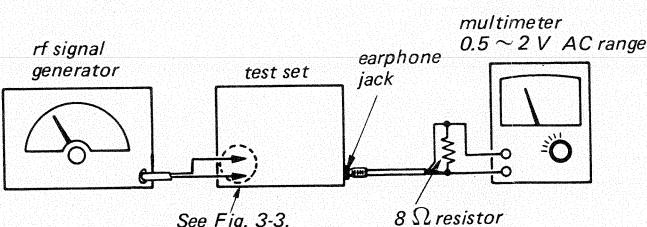


Fig. 3-2. FM i-f alignment setup (1).

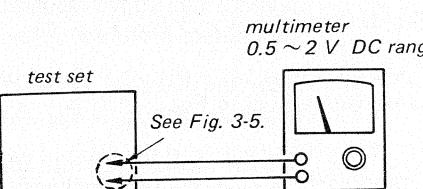


Fig. 3-4. FM i-f alignment setup (2).

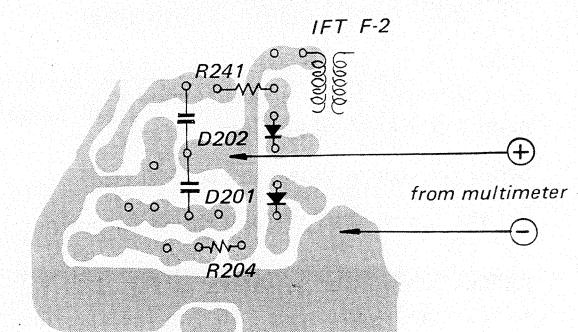


Fig. 3-5. Multimeter connection for FM i-f alignment.

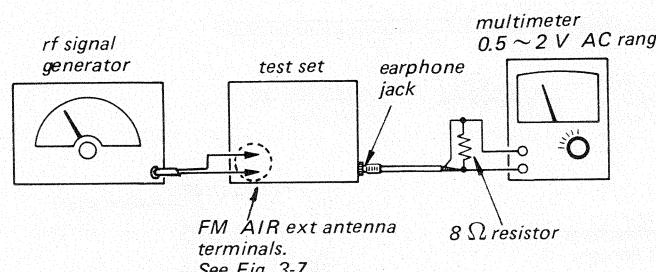


Fig. 3-6. AIR i-f alignment setup.

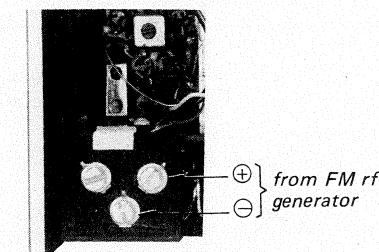


Fig. 3-7. FM rf signal generator coupling for AIR i-f alignment.

Item	Step	Rf Signal Generator Frequency	Receiver Dial Setting	Adjust	Procedure
FM I-f Alignment	1	10.7 MHz with FM modulation	No station, no beating position	Cores of IFT F101 IFT F-1 IFT F-2 IFT F-3	Test setup: See Fig. 3-2 and Fig. 3-3. Band switch setting: FM Adjust for maximum meter reading.
	2	10.7 MHz without modulation	— ditto —	Rf signal generator frequency	Carefully adjust rf signal generator frequency around 10.7 MHz for maximum meter reading.
	3				Repeat steps 1 and 2 two or three times.
	4	No input signal	— ditto —	Core of IFT F-3	Test setup: See Fig. 3-4 and Fig. 3-5. Adjust for "0V DC" meter reading.
AIR I-f Alignment	1	10.7 MHz	No station, no beating position	Cores of IFT AIR-1 IFT AIR-2 IFT AIR-3	Test setup: See Fig. 3-6 and Fig. 3-7. Band switch setting: AIR Adjust for maximum meter reading.
	2		— ditto —	— ditto —	Carefully adjust rf signal generator frequency and adjust for maximum meter reading.
	3				Repeat steps 1 and 2 two or three times.

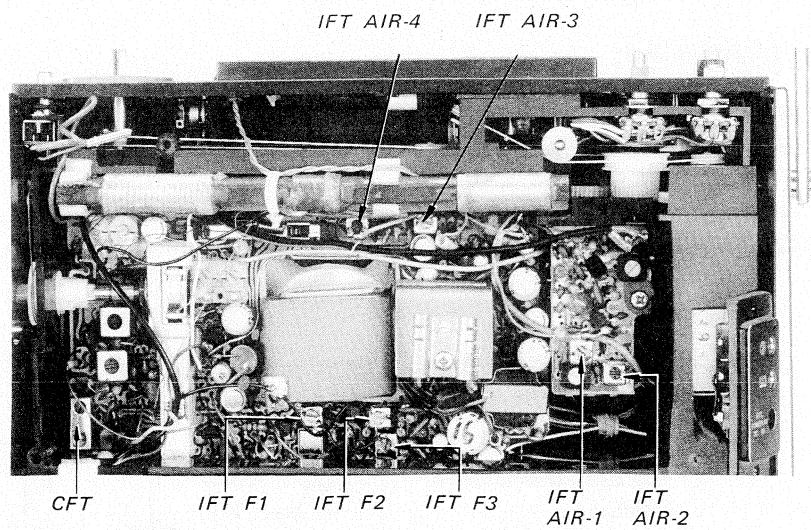


Fig. 3-8. Adjustment locations

**Note:** When  $0.5 \sim 2 V$  AC range is not available on the multimeter, use a VTVM instead of the multimeter or use a rectifying circuit with the multimeter  $0.5 \sim 2 V$  DC range as shown below.

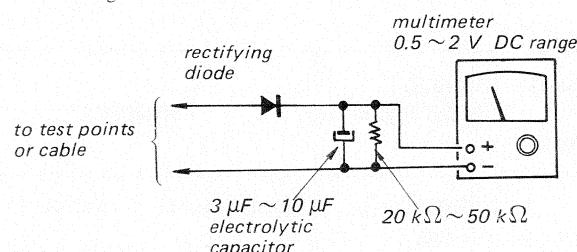


Fig. 3-9.

### 3-3. FREQUENCY COVERAGE AND TRACKING ADJUSTMENT

#### Test Equipment/Tools Required:

- \* Rf signal generator (for FM and AM)
- \* Loop antenna
- \* Multimeter (20 kΩ/V DC)
- \* 8 Ω resistor
- \* Screwdriver for alignment

#### Preparation

1. Multimeter Connection : To earphone jack with 8 Ω load resistor in parallel.
2. Modulation : FM --- 400 Hz, ± 22.5 kHz frequency modulated signal.  
AM --- 1 kHz 30%-amplitude modulated signal.
3. VOLUME Control Setting : Fully clockwise (MAX)
4. TONE Control Setting : Fully clockwise (H)

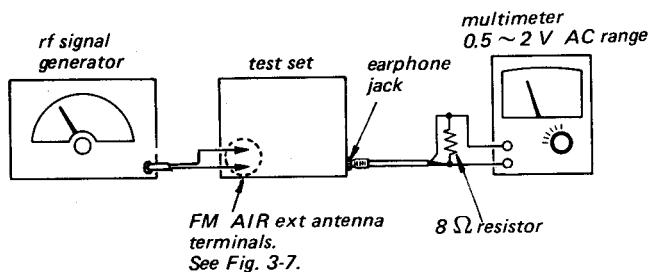


Fig. 3-10. FM/AIR frequency coverage and tracking adjustment setup

Adjustment	Rf Signal Generator Coupling	Rf Signal Generator Frequency	Receiver Dial Setting	Adjust (See Fig. 3-11)	Remarks
FM Frequency Coverage	Direct connection to FM AIR ext antenna terminals See Fig. 3-10.	86.5 MHz	Fully clockwise	FM osc coil L104	Band selector : FM (AFC : OFF) Adjust for maximum meter reading.
		109.5 MHz	Fully counter-clockwise	FM osc trimmer C1-8	
FM Tracking	The special test equipment required for this adjustment makes this strictly a factory adjustment.				
AIR Frequency Coverage	Direct connection to FM AIR ext antenna terminals See Fig. 3-10.	106.5 MHz	Fully clockwise	AIR osc coil L304	Band selector : AIR Adjust for maximum meter reading.
		138 MHz	Fully counter-clockwise	AIR osc trimmer C316	
AIR Tracking		106.5 MHz	Tune to 106.5 MHz signal	AIR rf coil L302	
		138 MHz	Tune to 138 MHz signal	AIR rf trimmer C308	

Note: FM frequency coverage is changed by adjusting osc coil (L104) and osc trimmer (C1-4) with the intended frequency signal from the rf signal generator.

Adjustment	Rf Signal Generator Coupling	Rf Signal Generator Frequency	Receiver Dial Setting	Adjust	Remarks
<b>MW Frequency Coverage</b>	Loop antenna See Fig. 3-1.	520 kHz	Fully clockwise	MW osc coil L201	Band selector : MW Adjust for maximum meter reading
		1,680 kHz	Fully counter-clockwise	MW osc trimmer C3-1	
<b>MW Tracking</b>		620 kHz	Tune to 620 kHz signal	MW ant coil L002	
		1,400 kHz	Tune to 1,400 kHz signal	MW ant trimmer C4-2	
<b>BEACON Frequency Coverage</b>		135 kHz	Fully clockwise	BEACON osc coil L202	Band selector : BEACON Adjust for maximum meter reading.
		420 kHz	Fully counter-clockwise	BEACON osc trimmer C3-2	
<b>BEACON Tracking</b>		200 kHz	Tune to 200 kHz signal	BEACON ant coil L001	
		350 kHz	Tune to 350 kHz signal	BEACON ant trimmer C4-1	

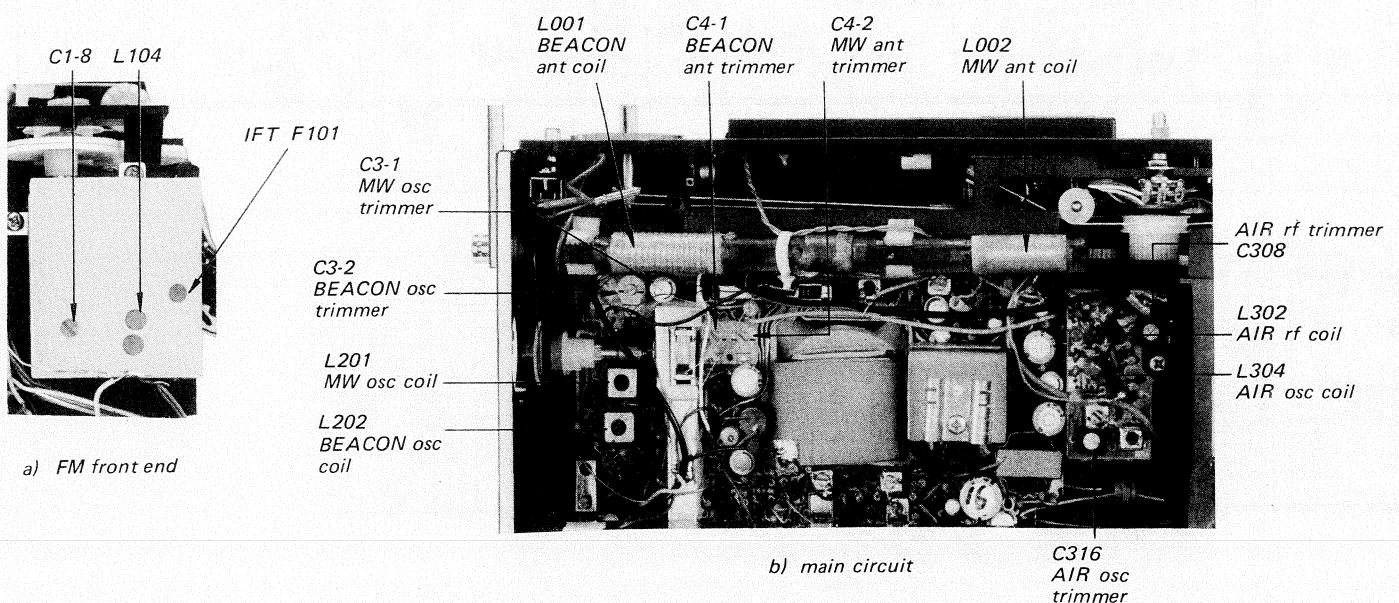


Fig. 3-11. Adjustment locations

### 3-4. VOLTAGE AND CURRENT ADJUSTMENT

#### 1. Regulator Voltage

Part to be selected : R248  
Band Selector : BEACON  
Power Requirement : Dc 6 V  
Adjustment : R248 must be selected to obtain 3.35~3.55 V at emitter of Q208.

R248 { 1-242-653 150 Ω  
1-242-655 180 Ω  
1-242-656 200 Ω  
1-242-657 220 Ω  
1-242-659 270 Ω

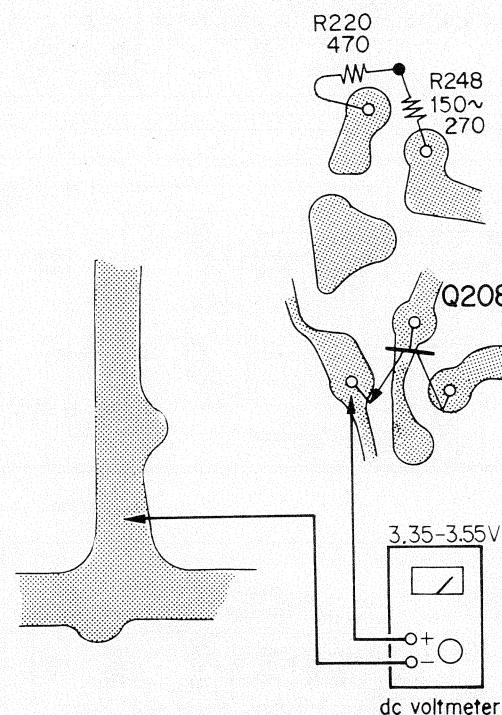


Fig. 3-12.

#### 2. AM Current Adjustment

Part to be selected : R218  
Band Selector : BEACON  
Power Requirement : Dc 6 V  
DF LEVEL Control : Rotate fully upward  
Adjustment : R218 must be selected to obtain 0.08~0.1 V across R218.

R218 { 1-244-720 91 kΩ  
1-244-721 100 kΩ  
1-244-723 120 kΩ  
1-244-727 130 kΩ  
1-244-725 150 kΩ

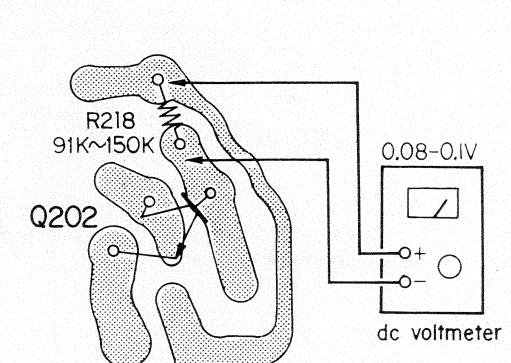
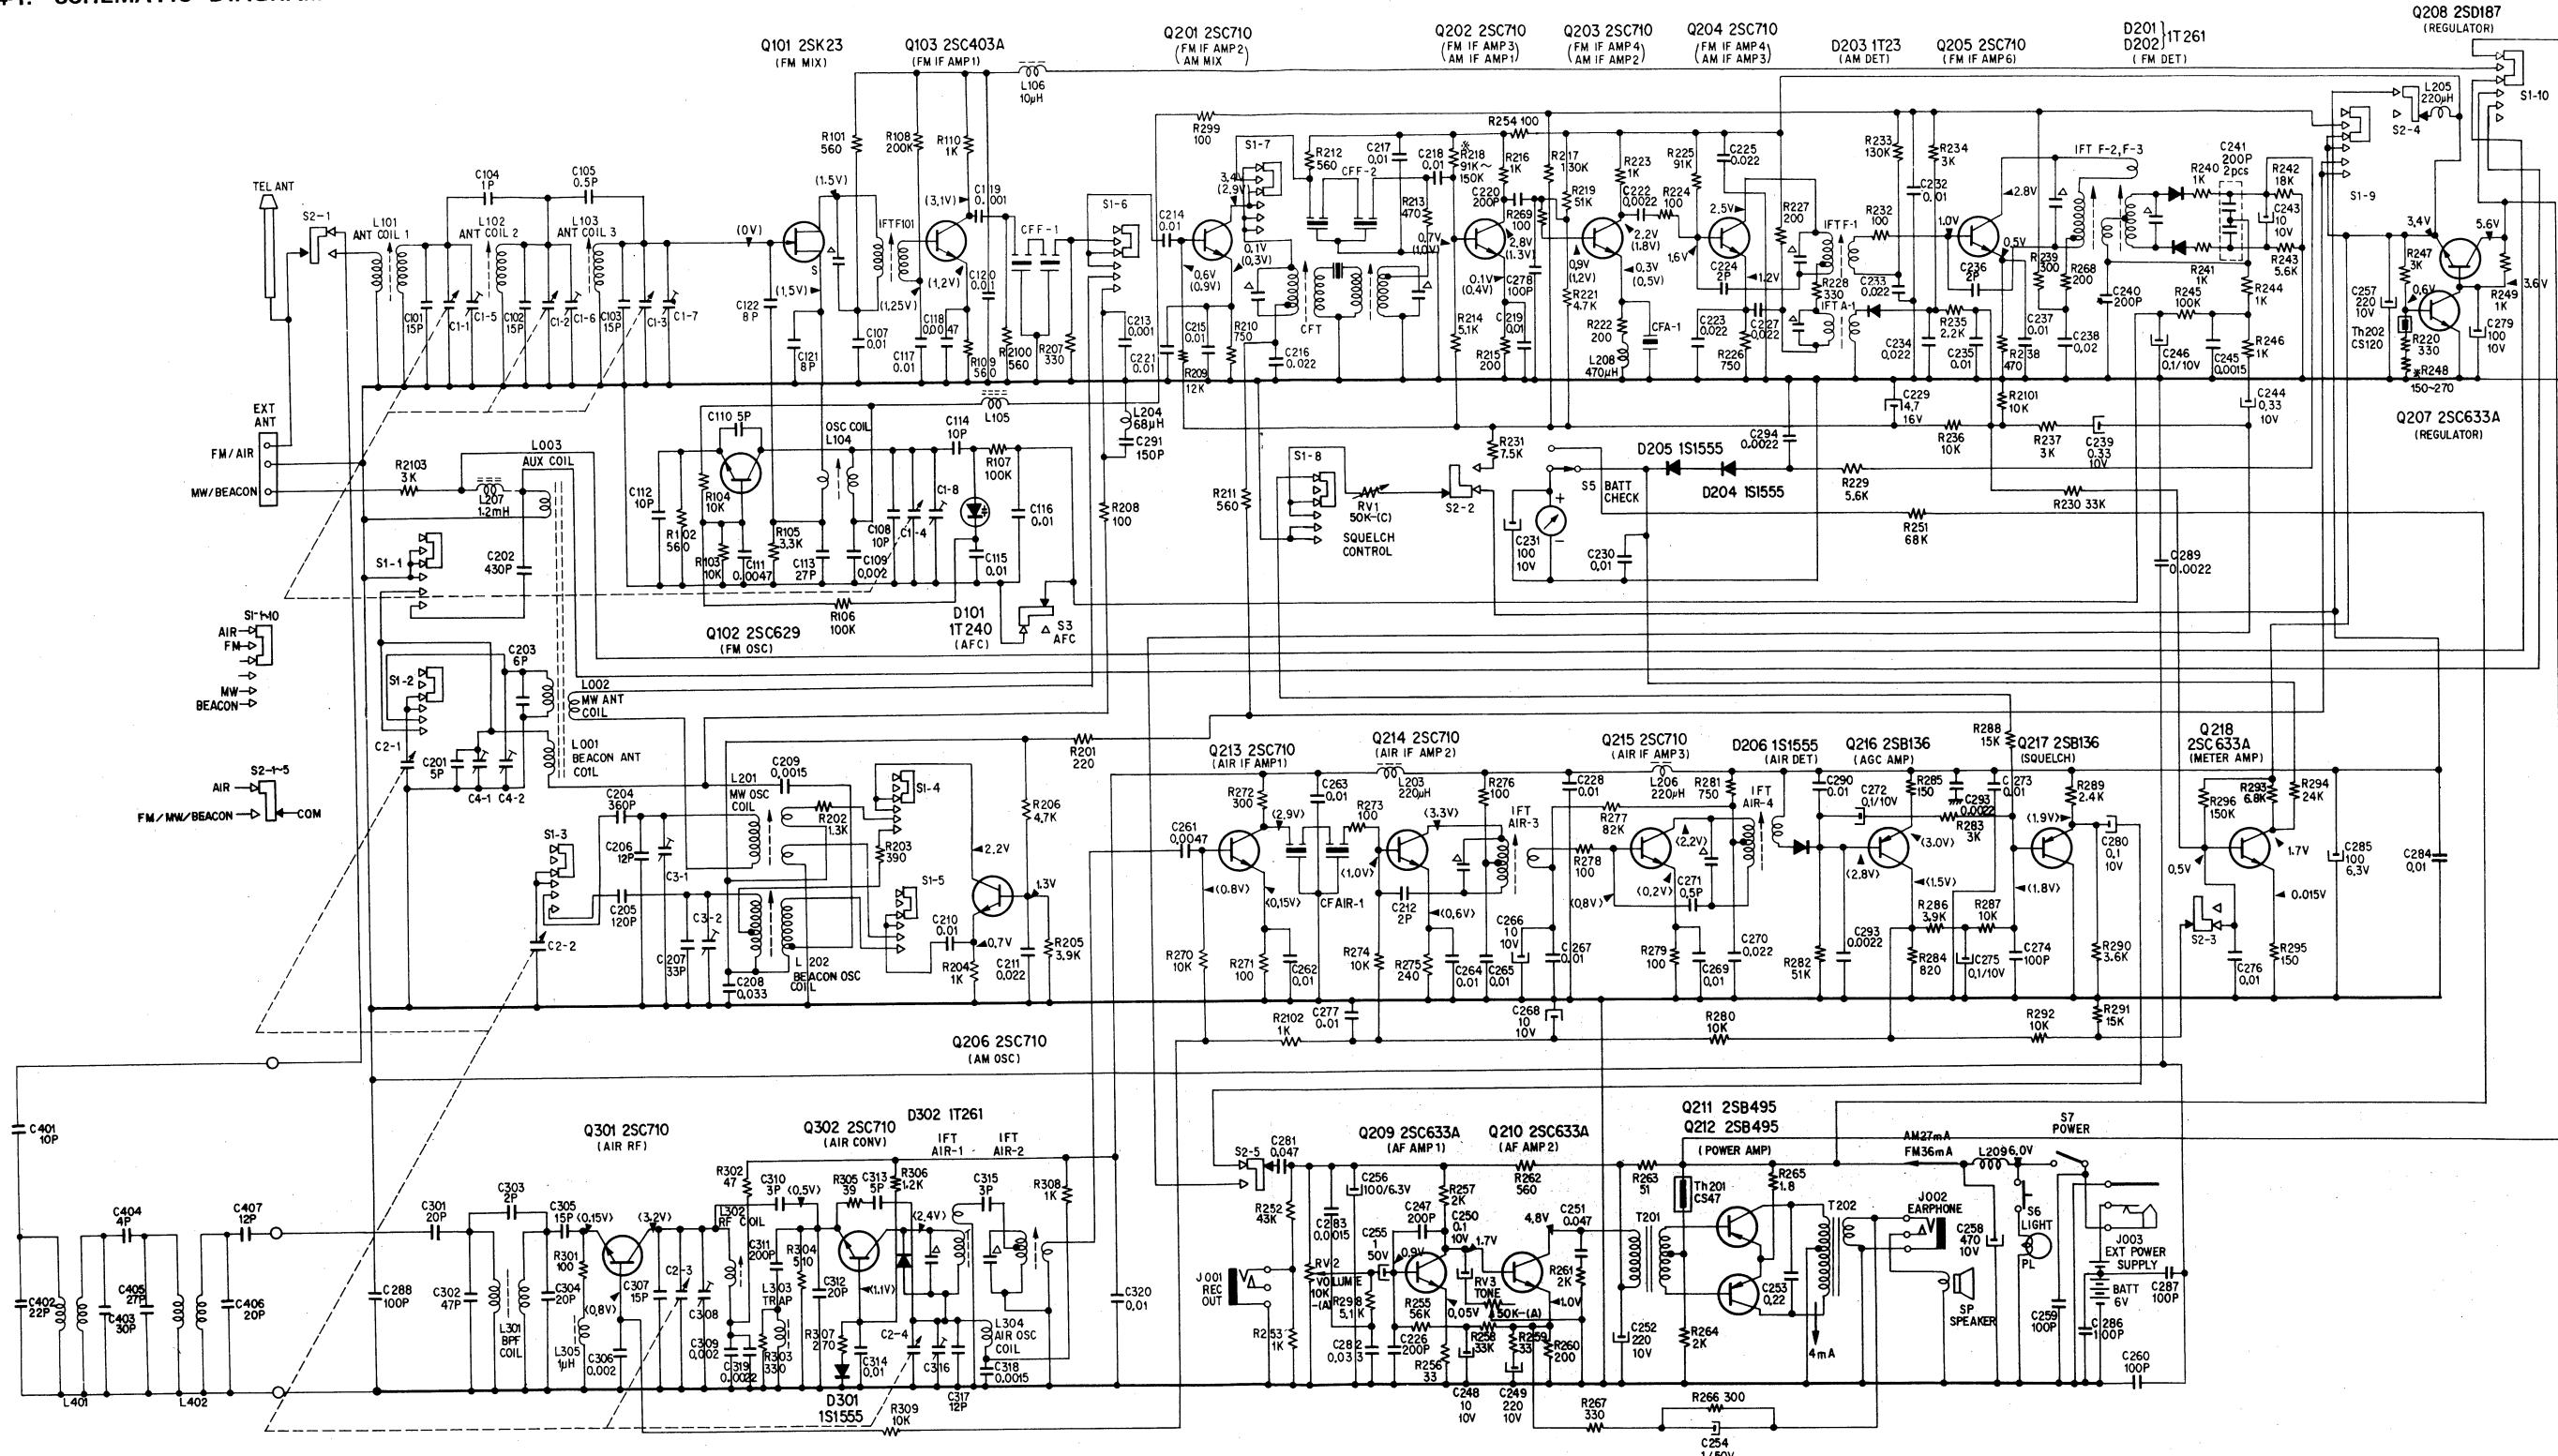


Fig. 3-13.

**SECTION 4**  
**SCHEMATIC AND MOUNTING DIAGRAMS**

**4-1. SCHEMATIC DIAGRAM****Notes:**

- All resistors and capacitors are in  $\Omega$  and  $\mu\text{F}$ , unless otherwise indicated.
- Capacitors marked  $\Delta$  are built in i-f transformers.


- The symbol  $*$  indicates a component whose value is selected to yield specified operating condition.
- Voltage value is measured to ground circuit with

a dc voltmeter ( $20 \text{ k}\Omega/\text{V}$ ) and current value is measured with a dc ammeter. Voltage and current are taken with no radio signal received. The values

shown in ( ) with band selector set to FM and in < > with AIR. Variations may be noted due to normal production tolerances.


#### 4-2. FM FROND END CIRCUIT BOARD (P1)

*— Conductor Side —*

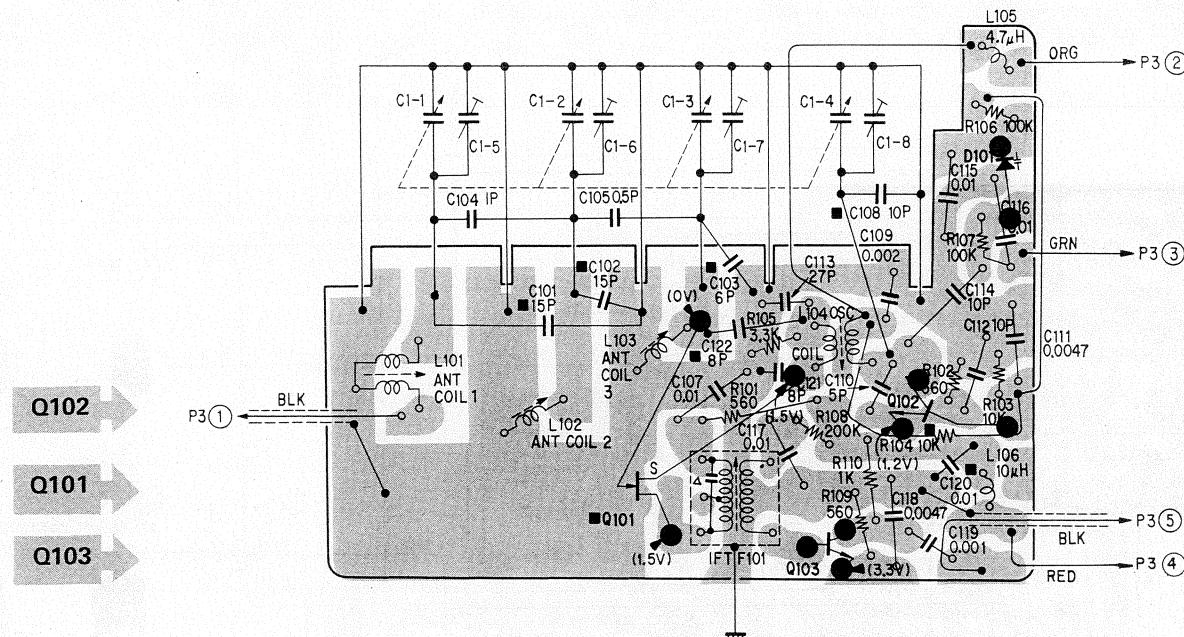

**Printed Circuit Board  
Part No. : 1-538-793-00**


C101, C102, C103, C120, C122, Q101 and R104 marked with ■ are mounted on the conductor.

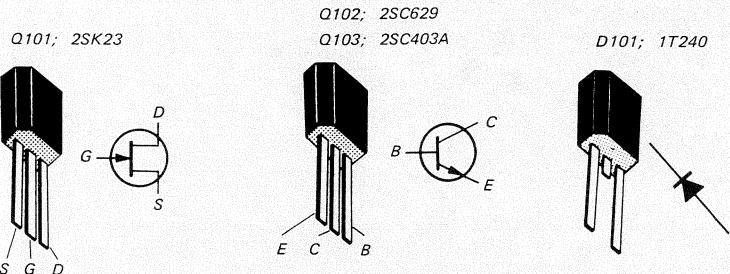

*Fig. 4-2.*

### 4-3. AIR BANDPASS FILTER CIRCUIT BOARD (P4)

*= Conductor Side =*

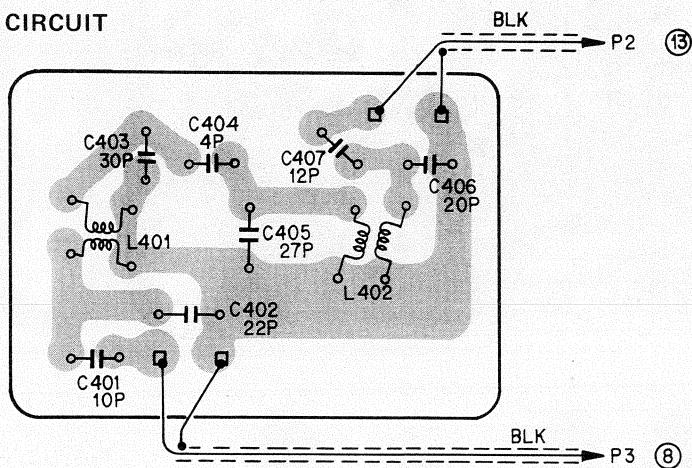


Printed Circuit Board Part No.: 1-591-004-00


*Fig. 4-3.*

#### 4-4. AIR FRONT END CIRCUIT BOARD (P2)

*— Conductor Side —*

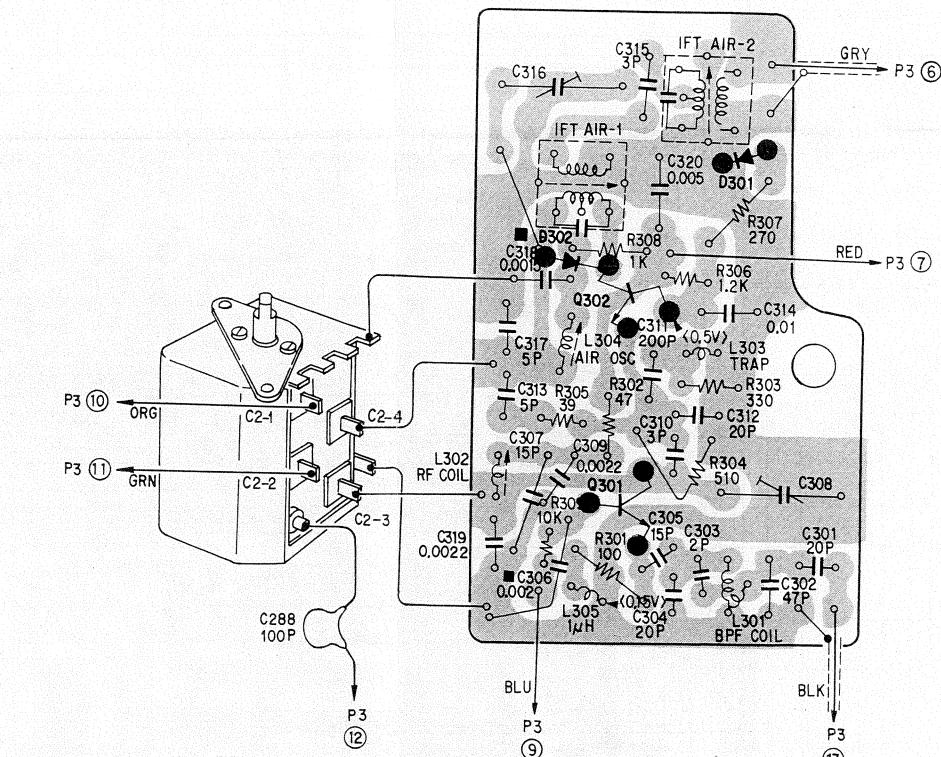

Printed Circuit Board Part No.: 1-581-207-00  
C306 and D302 marked with ■ are mounted  
on the conductor side.

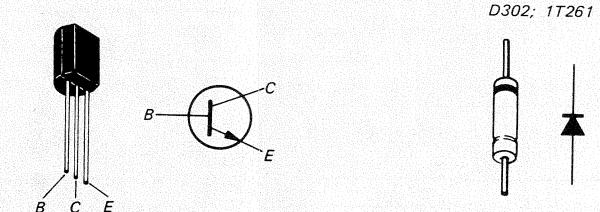


*Fig. 4-4.*

# **TFM-8600W TFM-8600W**

#### 4.5. MAIN CIRCUIT BOARD (P3)


= Conductor Side =

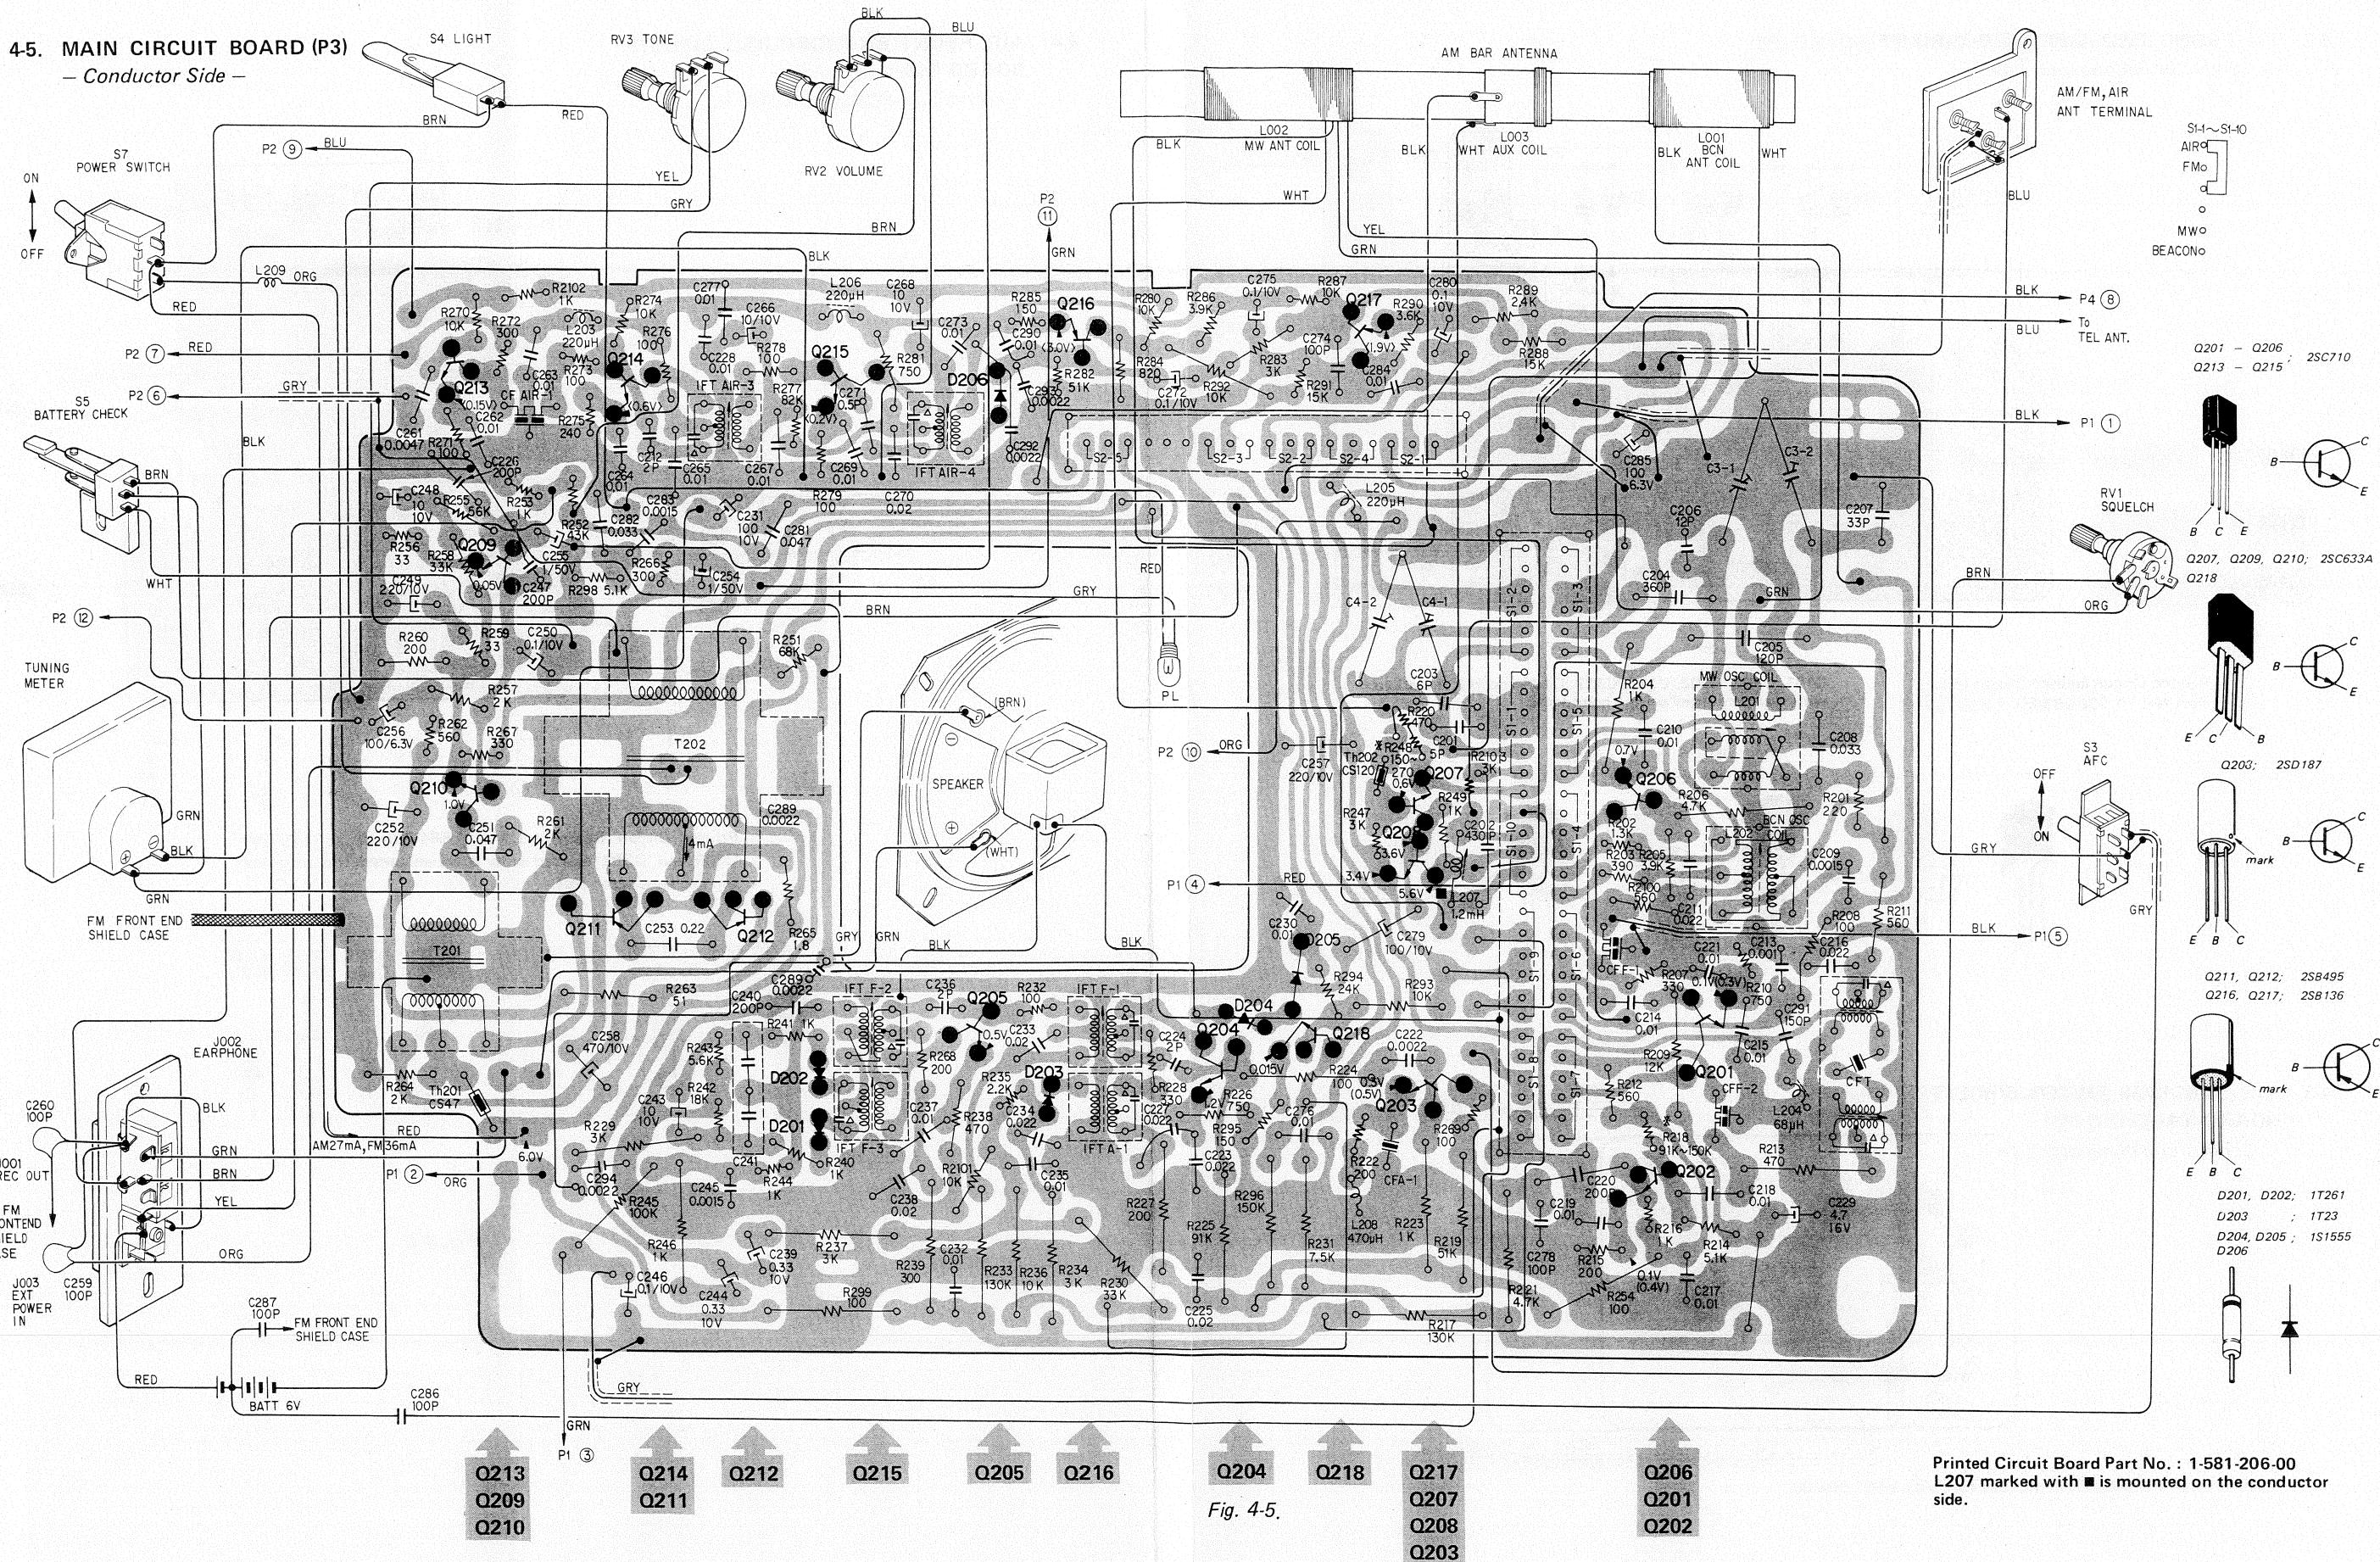


*Fig. 4-5.*

Printed Circuit Board Part No. : 1-581-206-00  
L207 marked with ■ is mounted on the conductor side.

**SECTION 5**  
**PACKING AND EXPLODED VIEWS**

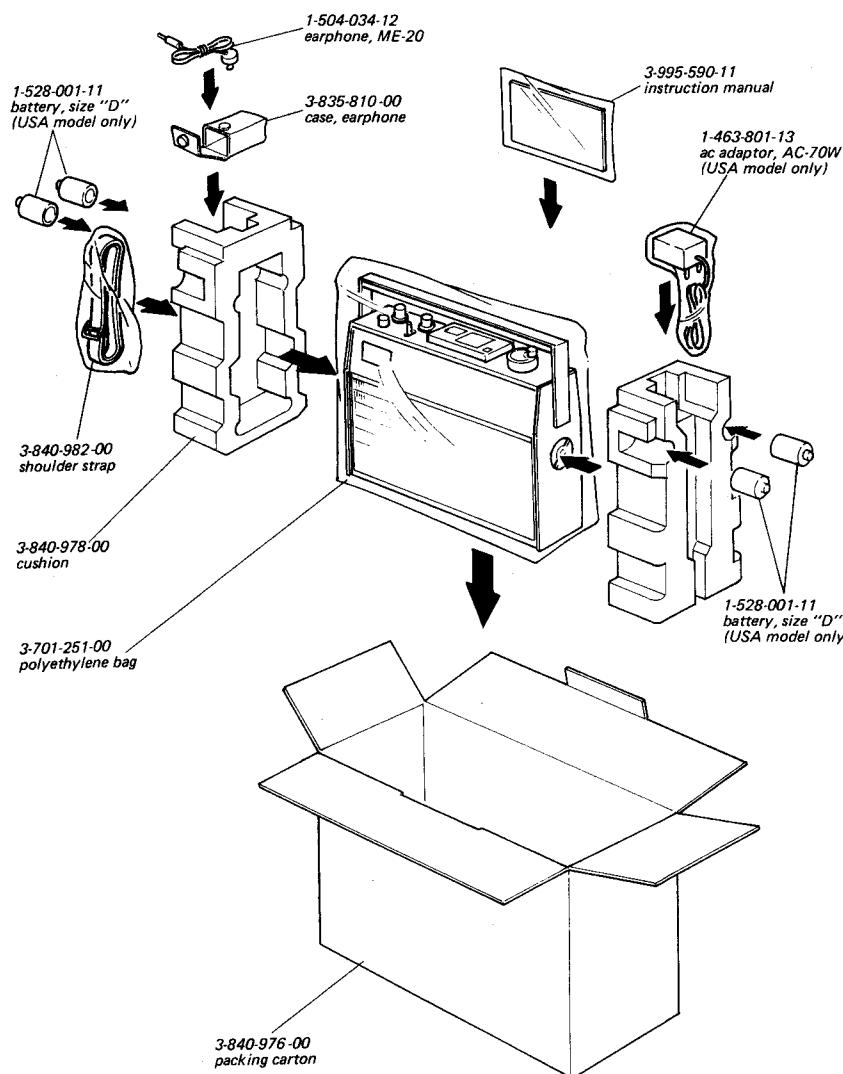
**5-1. PACKING**

**5-2. EXPLODED VIEW (1)**  
*Cabinet Ass'y*

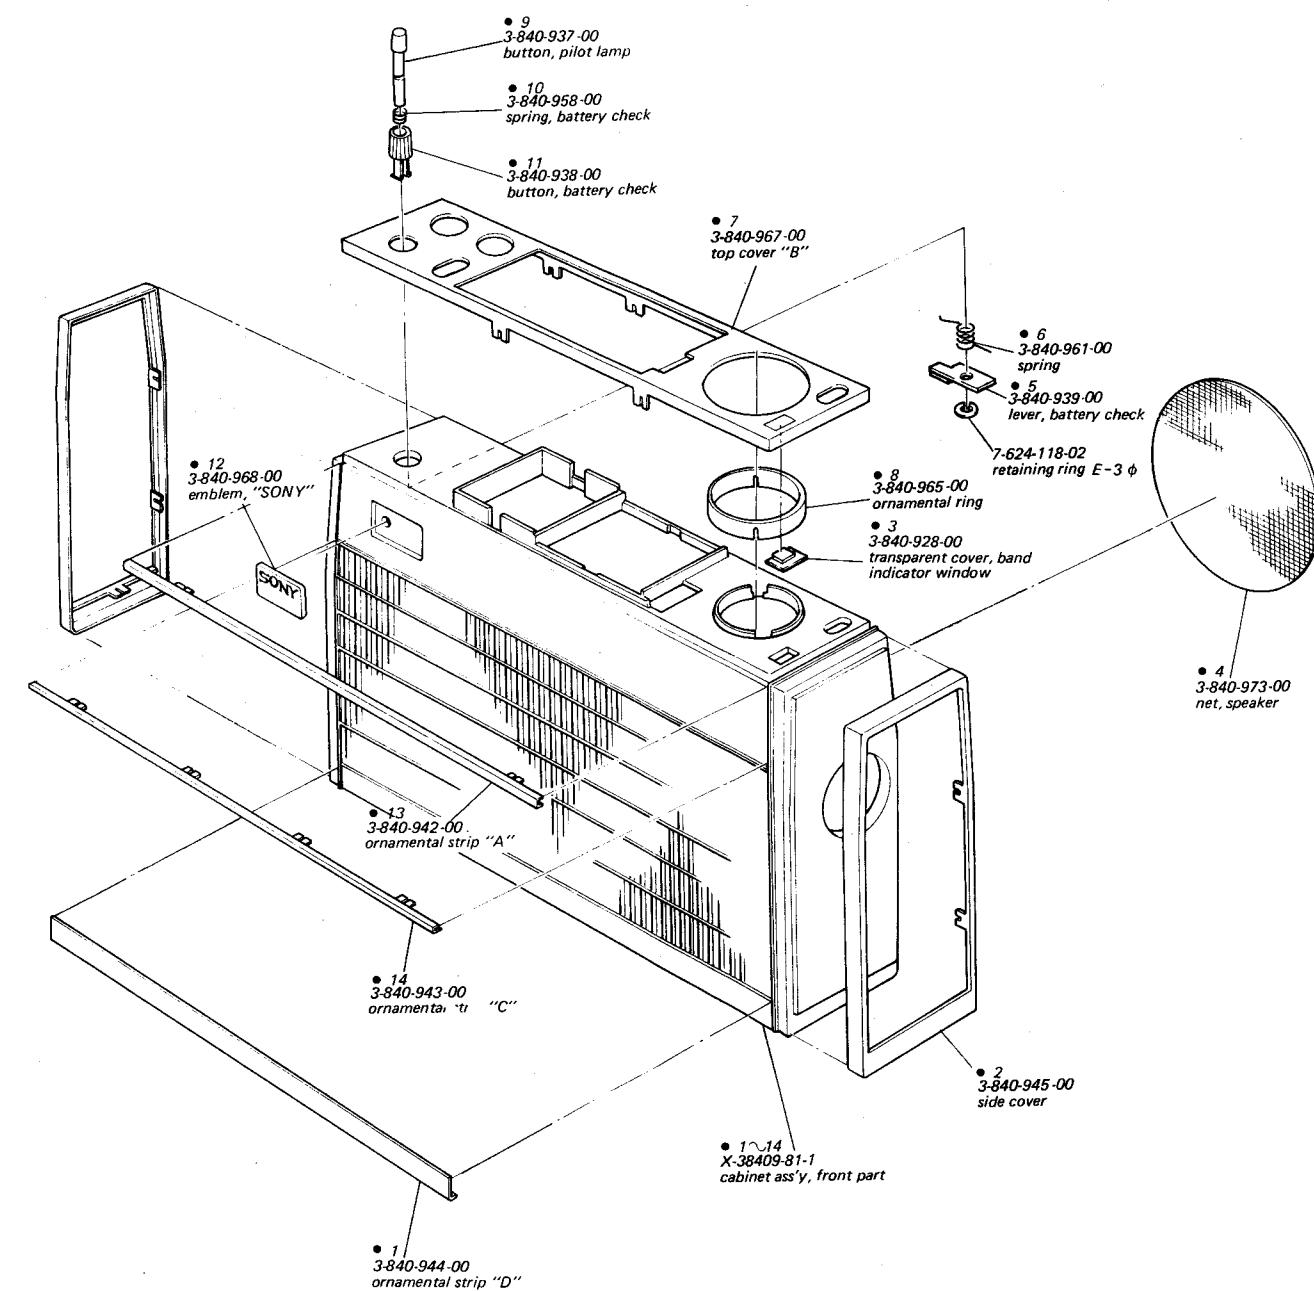**DETAIL "A"**

**TFM-8600W** **TFM-8600W**

### **5-3. EXPLODED VIEW (2)**

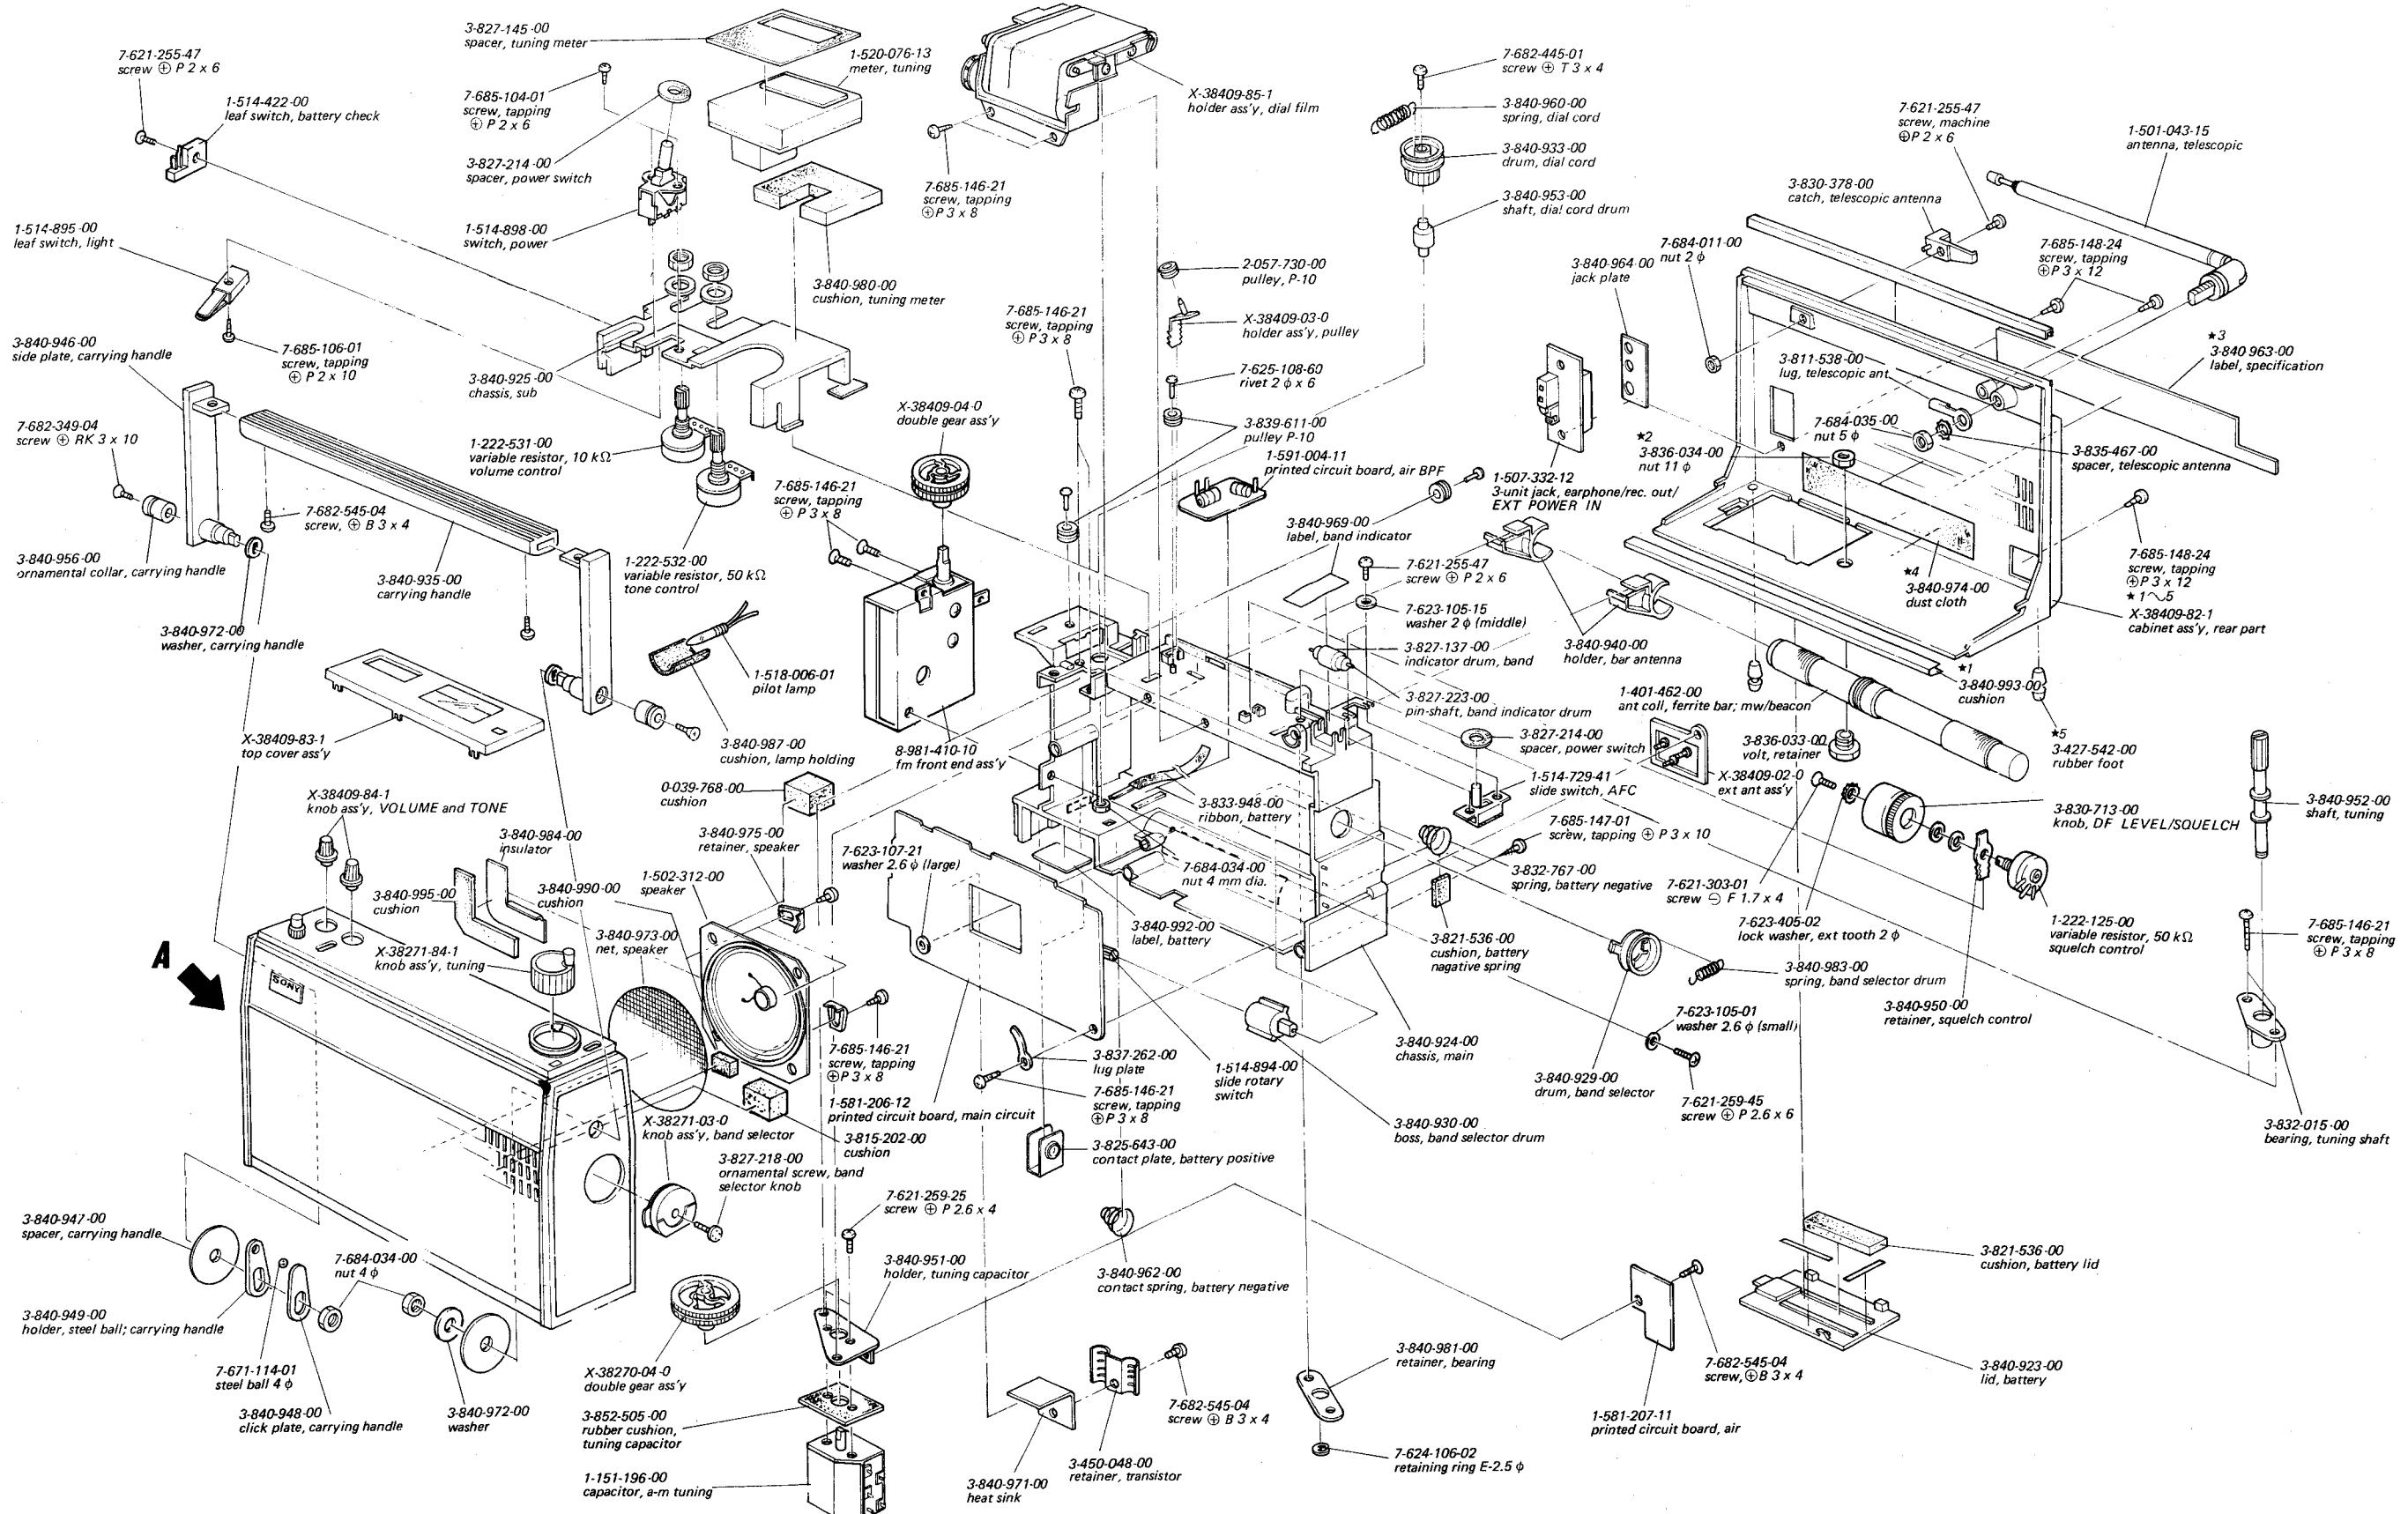

## SECTION 6

### ELECTRICAL PARTS LIST

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
<b>MOUNTED CIRCUIT BOARDS</b>					
8-981-410-10	FM front end ass'y		L104	1-405-386	osc coil, fm
8-981-410-11	mounted circuit board, AIR front end		L105	1-407-186	4.7 $\mu$ H, micro inductor
8-981-410-15	mounted circuit board, main circuit		L106	1-407-190	10 $\mu$ H, micro inductor
8-981-410-17	mounted circuit board, AIR bandpass filter		L201	1-405-330	osc coil, mw
<b>SEMICONDUCTORS</b>					
Q101	transistor	2SK23	L202	1-405-482	osc coil, beacon
Q102	transistor	2SC629	L203	1-407-173	220 $\mu$ H, micro inductor
Q103	transistor	2SC403A	L204	1-407-167	68 $\mu$ H, micro inductor
Q201	transistor	2SC710	L205	1-407-173	220 $\mu$ H, micro inductor
Q202	transistor	2SC710	L206	1-407-173	220 $\mu$ H, micro inductor
Q203	transistor	2SC710	L207	1-407-196	1.2 mH, micro inductor
Q204	transistor	2SC710	L208	1-407-177	470 $\mu$ H, micro inductor
Q205	transistor	2SC710	L209	1-421-006-14	coil, choke
Q206	transistor	2SC710	L301	1-401-383	filter coil, air ant
Q207	transistor	2SC633A	L302	1-425-533-13	rf coil, air
Q208	transistor	2SD187	L303	1-407-178	1 $\mu$ H, micro inductor
Q209	transistor	2SC633A	L304	1-405-389	osc coil, air
Q210	transistor	2SC633A	L305	1-407-178	1 $\mu$ H, micro inductor
Q211	transistor	2SB495	I401	1-401-484-00	BPF coil, air
Q212	transistor	2SB495	I402	1-401-484-00	BPF coil, air
Q213	transistor	2SC710	IFT F101	1-403-294	transformer, fm i-f
Q214	transistor	2SC710	IFT F1	1-403-244-31	transformer, fm i-f
Q215	transistor	2SC710	IFT F2	1-403-272-31	transformer, fm discriminator
Q216	transistor	2SB136	IFT F3	1-403-273-31	transformer, fm discriminator
Q217	transistor	2SB136	IFT A1	1-403-137	transformer, a-m i-f
Q218	transistor	2SC633A	IFT AIR-1	1-403-242-31	transformer, air i-f
Q301	transistor	2SC710	IFT AIR-2	1-403-243-31	transformer, air i-f
Q302	transistor	2SC710	IFT AIR-3	1-403-244-31	transformer, air i-f
D101	diode	1T240	IFT AIR-4	1-403-555	transformer, air i-f
D201	diode	1T261	CF F-1	1-527-184-13	ceramic filter, fm i-f
D202	diode	1T261	CF F-2	1-527-184-13	ceramic filter, fm i-f
D203	diode	1T23	CF A-1	1-403-154	ceramic filter, a-m i-f
D204	diode	1S1555	CFT	1-403-144	ceramic filter, a-m i-f
D205	diode	1S1555	CF AIR-1	1-527-501-13	ceramic filter, air i-f
D206	diode	1S1555	T201	1-423-072-21	transformer, driver
D301	diode	1S1555	T202	1-427-290	transformer, output
<b>CAPACITORS</b>					
All capacitors are in microfarads unless otherwise indicated. (p = $\mu\mu$ F; elect = electrolytic)					
L001, 002	1-401-462	ant coil, ferrite bar; mw/beacon	C101	1-101-861	15 p ceramic
L101	1-425-526	ant coil 1, fm	C102	1-101-861	15 p ceramic
L102	1-425-525	ant coil 2, fm	C103	1-101-861	15 p ceramic
L103	1-425-525	ant coil 3, fm	C104	1-101-937	1 p ceramic
<b>COILS AND TRANSFORMERS</b>					
			C105	1-101-936	0.5 p ceramic
			C106	-----	
			C107	1-101-072	0.01 ceramic
			C108	1-102-714	10 p ceramic
			C109	1-102-121	0.002 ceramic
			C110	1-102-864	5 p ceramic
			C111	1-102-090	0.0047 ceramic

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>		<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	
C112	1-102-508	10 p	ceramic	C243	1-121-469	10	10 V
C113	1-101-869	27 p	ceramic	C244	1-127-021	0.33	10 V
C114	1-101-976	10 p	ceramic	C245	1-105-837-12	0.0015	solid aluminum
C115	1-101-072	0.01	ceramic	C246	1-127-019	0.1	10 V
C116	1-101-072	0.01	ceramic	C247	1-107-138	200 p	mylar
C117	1-101-072	0.01	ceramic	C248	1-121-469	10	10 V
C118	1-105-829-12	0.0047	mylar	C249	1-121-420	220	10 V
C119	1-101-918	0.001	ceramic	C250	1-127-019	0.1	10 V
C120	1-101-072	0.01	ceramic	C251	1-105-841-12	0.047	solid aluminum
C121	1-101-958	8 p	ceramic	C252	1-121-420	220	10 V
C122	1-101-958	8 p	ceramic	C253	1-105-849-12	0.22	mylar
C201	1-102-942	5 p	ceramic	C254	1-121-391	1	50 V
C202	1-107-243	430 p	silvered mica	C255	1-121-391	1	50 V
C203	1-102-943	6 p	ceramic	C256	1-121-413	100	6.3 V
C204	1-107-231	360 p	silvered mica	C257	1-121-420	220	10 V
C205	1-107-087	120 p	silvered mica	C258	1-121-425	470	10 V
C206	1-102-949	12 p	ceramic	C259	1-102-975	100 p	elect
C207	1-102-963	33 p	ceramic	C260	1-102-975	100 p	ceramic
C208	1-105-839-12	0.033	mylar	C261	1-101-922	0.0047	mylar
C209	1-105-663-12	0.0015	mylar	C262	1-105-833-12	0.01	ceramic
C210	1-105-833-12	0.01	mylar	C263	1-101-923	0.01	ceramic
C211	1-105-837-12	0.022	mylar	C264	1-105-833-12	0.01	mylar
C212	1-102-576	1.5 p	ceramic	C265	1-105-833-12	0.01	ceramic
C213	1-105-821-12	0.001	mylar	C266	1-121-469	10	10 V
C214	1-101-923	0.01	ceramic	C267	1-101-923	0.01	elect
C215	1-105-833-12	0.01	mylar	C268	1-121-469	10	10 V
C216	1-105-837-12	0.022	mylar	C269	1-105-833-12	0.01	mylar
C217	1-105-833-12	0.01	mylar	C270	1-101-924	0.022	ceramic
C218	1-101-923	0.01	ceramic	C271	1-101-837	0.5 p	ceramic
C219	1-105-833-12	0.01	mylar	C272	1-127-019	0.1	10 V
C220	1-107-138	200 p	silvered mica	C273	1-105-833-12	0.01	solid aluminum
C221	1-105-833-12	0.01	mylar	C274	1-101-923	0.01	mylar
C222	1-101-919	0.0022	ceramic	C275	1-127-019	0.1	10 V
C223	1-105-837-12	0.022	mylar	C276	1-101-923	0.01	ceramic
C224	1-102-939	2 p	ceramic	C277	1-105-833-12	0.01	mylar
C225	1-101-924	0.022	ceramic	C278	1-102-975	100 p	ceramic
C226	1-107-138	200 p	silvered mica	C279	1-121-413	100	10 V
C227	1-105-837-12	0.022	mylar	C280	1-127-019	0.1	10 V
C228	1-101-923	0.01	ceramic	C281	1-105-841-12	0.047	solid aluminum
C229	1-121-395	4.7 16 V	elect	C282	1-105-839-12	0.033	mylar
C230	1-101-923	0.01	ceramic	C283	1-105-663-12	0.0015	mylar
C231	1-121-413	100 10 V	elect	C284	1-101-923	0.01	ceramic
C232	1-101-923	0.01	ceramic	C285	1-121-413	100	6.3 V
C233	1-101-924	0.022	ceramic	C286	1-102-973	100 p	elect
C234	1-105-837-12	0.022	mylar	C287	1-102-973	100 p	ceramic
C235	1-105-833-12	0.01	mylar	C288	1-102-973	100 p	ceramic
C236	1-102-939	2 p	ceramic	C289	1-105-825-12	0.0022	mylar
C237	1-105-833-12	0.01	mylar	C290	1-105-833-12	0.01	ceramic
C238	1-101-924	0.02	ceramic	C291	1-107-137	150 p	silvered mica
C239	1-127-021	0.33 10 V	solid aluminum	C292	1-101-919	0.0022	ceramic
C240	1-107-138	200 p	silvered mica	C293	1-101-919	0.0022	ceramic
C241	1-107-255-11	encapsulated component 200 p x 2		C294	1-101-919	0.0022	ceramic
C242		-----		C301	1-102-958	20 p	ceramic

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>		<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	
C302	1-102-880	47 p	ceramic	R208	1-242-649	100	
C303	1-102-939	2 p	ceramic	R209	1-242-699	12 k	
C304	1-102-958	20 p	ceramic	R210	1-242-670	750	
C305	1-102-951	15 p	ceramic	R211	1-242-667	560	
C306	1-101-919	0.0022	ceramic	R212	1-242-667	560	
C307	1-102-951	15 p	ceramic	R213	1-244-665	470	
C308	1-141-097-21	capacitor, trimmer		R214	1-242-690	5.1 k	
C309	1-101-919	0.0022	ceramic	R215	1-242-656	200	
C310	1-102-940	3 p	ceramic	R216	1-242-673	1 k	
C311	1-107-138-11	200 p	silvered mica	R217	1-244-724	130 k	
C312	1-102-958	20 p	ceramic	* R218	1-244-720	91 k	
C313	1-101-997	5 p	ceramic		1-244-721	100 k	
C314	1-101-923	0.01	ceramic		1-244-723	120 k	
C315	1-102-940	3 p	ceramic		1-244-724	130 k	
C316	1-141-097-21	capacitor, trimmer			1-244-725	150 k	
C317	1-102-749	12 p	ceramic	R219	1-242-714	51 k	
C318	1-105-823-12	0.0015	mylar	R220	1-244-661	330	
C319	1-101-919	0.0022	ceramic	R221	1-244-689	4.7 k	
C320	1-101-923	0.01	ceramic	R222	1-242-656	200	
C401	1-102-947	10 p	ceramic	R223	1-244-673	1 k	
C402	1-102-959	22 p	ceramic	R224	1-244-649	100	
C403	1-102-962	30 p	ceramic	R225	1-244-720	91 k	
C404	1-102-941	4 p	ceramic	R226	1-242-670	750	
C405	1-102-961	27 p	ceramic	R227	1-244-656	200	
C406	1-102-958	20 p	ceramic	R228	1-242-661	330	
C407	1-102-949	12 p	ceramic	R229	1-242-684	3 k	
C1-1~C1-8	1-151-223-12	capacitor, fm tuning		R230	1-244-709	33 k	
C2-1~C2-4	1-151-196	capacitor, a-m tuning		R231	1-244-694	7.5 k	
C3-1~C3-2	1-141-011	capacitor, trimmer 2 gang		R232	1-242-640	100	
C4-1~C4-2	1-141-011	capacitor, trimmer 2 gang		R233	1-244-724	130 k	
				R234	1-244-684	3 k	
				R235	1-244-681	2.2 k	
				R236	1-244-697	10 k	
				R237	1-244-684	3 k	
				R238	1-244-665	470	
				R239	1-242-669	300	
				R240	1-242-673	1 k	
				R241	1-242-673	1 k	
				R242	1-242-703	18 k	
				R243	1-242-691	5.6 k	
				R244	1-244-673	1 k	
				R245	1-244-721	100 k	
				R246	1-244-673	1 k	
				R247	1-242-684	3 k	
				* R248	1-242-653	150	
					1-242-655	180	
					1-242-656	200	
					1-242-657	220	
					1-242-659	270	
				R249	1-242-673	1 k	
				R250	1-242-701	15 k	
				R251	1-242-717	68 k	
				R252	1-242-712	43 k	

## RESISTORS

All resistors are in ohms,  $\pm 5\%$ ,  $\frac{1}{16}$  W, carbon type unless otherwise indicated. (k = 1000)

R101	1-208-027	560	$\frac{1}{16}$ W	ceramic	R201	1-242-657	220
R102	1-208-027	560	$\frac{1}{16}$ W	ceramic	R202	1-242-676	1.3 k
R103	1-244-697	10 k			R203	1-242-663	390
R104	1-244-697	10 k			R204	1-244-673	1 k
R105	1-208-045	3.3 k	$\frac{1}{16}$ W	ceramic	R205	1-242-687	3.9 k
R106	1-208-145	100 k	$\frac{1}{16}$ W	ceramic	R206	1-242-689	4.7 k
R107	1-208-145	100 k	$\frac{1}{16}$ W	ceramic	R207	1-242-661	330
R108	1-208-088	200 k	$\frac{1}{16}$ W	ceramic	* R248	1-242-653	150
R109	1-208-027	560	$\frac{1}{16}$ W	ceramic		1-242-655	180
R110	1-208-033	1 k	$\frac{1}{16}$ W	ceramic		1-242-656	200
R201	1-242-657	220				1-242-657	220
R202	1-242-676	1.3 k				1-242-659	270
R203	1-242-663	390			R249	1-242-673	1 k
R204	1-244-673	1 k			R250	1-242-701	15 k
R205	1-242-687	3.9 k			R251	1-242-717	68 k
R206	1-242-689	4.7 k			R252	1-242-712	43 k

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
R253	1-242-673	1 k	R296	1-242-725	150 k
R254	1-244-649	100	R297		-----
R255	1-242-715	56 k	R298	1-242-690	5.1 k
R256	1-242-637	33	R299	1-244-649	100
R257	1-242-680	2 k	R2100	1-244-667	560
R258	1-242-709	33 k	R2101	1-242-697	10 k
R259	1-242-637	33	R2102	1-242-673	1 k
R260	1-242-656	200	R2103	1-244-684	3 k
R261	1-242-680	2 k	R301	1-242-649	100
R262	1-242-667	560	R302	1-242-641	47
R263	1-242-642	51	R303	1-242-661	330
R264	1-242-680	2 k	R304	1-242-666	510
R265	1-242-607	1.8	R305	1-242-639	39
R266	1-242-660	300	R306	1-242-675	1.2 k
R267	1-242-661	330	R307	1-242-659	270
R268	1-242-656	200	R308	1-242-673	1 k
R269	1-242-649	100	R309	1-242-697	10 k
R270	1-242-697	10 k	RV1	1-222-125	variable resistor 50 k-(C) squelch control
R271	1-242-649	100	RV2	1-222-531	variable resistor 10 k-(A) VOLUME control
R272	1-242-660	300	RV3	1-222-532	variable resistor 50 k-(A) TONE control
R273	1-242-649	100			
R274	1-242-697	10 k			
R275	1-242-658	240			
R276	1-242-649	100			
R277	1-242-719	82 k			
R278	1-242-649	100			
R279	1-242-649	100			
R280	1-240-697	10 k	TEL ANT	1-501-043-15	antenna, telescopic
R281	1-242-670	750	SP 1	1-502-312	speaker
R282	1-244-714	51 k	J001 ~ 003	1-507-332-12	3-unit jack
R283	1-242-684	3 k	S1	1-514-894	slide rotary switch, band selector
R284	1-244-671	820	S2	1-514-453-21	slide switch, band selector
R285	1-242-653	150	S3	1-514-729-41	slide switch, AFC
R286	1-242-687	3.9 k	S4		-----
R287	1-242-697	10 k	S5	1-514-422	leaf switch, battery check
R288	1-242-701	15 k	S6	1-514-895	leaf switch, light
R289	1-242-682	2.4 k	S7	1-514-898	switch, power
R290	1-242-686	3.6 k	TM	1-520-076-13	meter, tuning
R291	1-242-701	15 k	PL	1-518-006-01	pilot lamp
R292	1-242-697	10 k		1-538-793-12	printed circuit board, fm front end
R293	1-242-693	6.8 k		1-581-207-11	printed circuit board, air
R294	1-242-706	24 k		1-581-206-12	printed circuit board, main circuit
R295	1-242-653	150		1-506-108-31	pin, antenna terminal
				1-591-004-11	printed circuit board, air bandpass filter

**SONY CORPORATION**

# SONY®

**NEW**

Eingegangen  
31. JULI 1972  
Erledigt

## Complete Spare Parts List

Model TFM-8600W

General Export Model

USA Model: Serial No. 13,501 and later

### "IMPORTANT"

When ordering parts, please do not fail to furnish us the following:

1. Part Number
2. Model Name
3. Description as mentioned in this parts list

We are now using EDPS (Electronic Data Processing System) in all the departments concerned, for procurement, inventory control, packing, warehousing, etc. Your orders are processed mainly from the PART NUMBERS referred by you. Incorrect part numbers, therefore, will result in incorrect parts shipment. To assure prompt shipment of correct parts, your cooperation will be appreciated.

### NOTE:

Prices are subject to change without notice.

## SONY CORPORATION

COMPLETE SPARE PARTS LIST FOR TFM-8600W

General Export Model

USA Model  
(Serial No. 13,501 and later) JULY, 1972

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
<b>A. MECHANICAL PARTS</b>		
X-38409-02	Ext Ant. Ass'y -----	\$0.17
X-38409-03	Holder Ass'y, pulley -----	0.05
X-38270-04	Double Gear Ass'y -----	0.06
X-38271-03	Knob Ass'y, band selector -----	0.31
X-38409-81-1	Cabinet Ass'y, front part; including -----	3.88
3-840-939	Lever, battery check -----	0.01
3-840-943	Ornamental Strip "C" -----	0.10
3-840-944	Ornamental Strip "D" -----	0.07
3-840-942	Ornamental Strip "A" -----	0.08
3-840-937	Button, pilot lamp -----	0.03
3-840-938	Button, battery check -----	0.03
3-840-958	Spring, battery check -----	0.01
3-840-973	Net, speaker -----	0.02
3-840-961	Spring -----	0.01
3-840-968	Emblem, "SONY" -----	0.12
3-840-928	Transparent Cover, band indicator window -----	0.03
3-840-945	Side Cover -----	0.24
3-840-965	Ornamental Ring -----	0.12
3-840-967	Top Cover B -----	0.60
X-38409-82-1	Cabinet Ass'y, rear part; including -----	1.70
3-427-542	Rubber Foot -----	0.02
3-840-963	Label, specification -----	0.19
3-849-993	Cushion -----	0.02
3-836-033	Screw -----	0.23
3-836-034	Nut, 11 mm dia -----	0.10
* * *		
X-38409-83-1	Top Cover Ass'y -----	0.65
X-38409-84-1	Knob Ass'y, VOLUME and TONE -----	0.06
X-38409-85-1	Holder Ass'y, dial film -----	1.10
X-38271-84-1	Knob Ass'y, tuning -----	0.25
3-811-538	Lug, telescopic ant -----	0.01
3-825-643	Contact Plate, battery positive -----	0.04
3-827-137	Indicator Drum, band -----	0.60
3-827-145	Spacer, tuning meter -----	0.01
3-827-214	Spacer, power switch -----	0.01
3-827-218	Ornamental Screw, band selector knob -----	0.04
3-827-223	Pin-shaft, band indicator drum -----	0.01

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
3-830-378	Catch, telescopic antenna -----	\$0.02
3-830-713	Knob, DF LEVEL/SQUELCH -----	0.04
3-832-015	Bearing, tuning shaft -----	0.02
3-832-767	Spring, battery negative -----	0.03
3-833-948	Ribbon, battery -----	0.02
3-835-467	Spacer, telescopic antenna -----	0.02
3-837-262	Lug Plate -----	0.01
3-839-611	Pulley P-10 -----	0.01
3-852-505	Rubber Cushion, tuning capacitor -----	0.04
4-006-255	Check Pin -----	0.01
3-840-923	Lid, battery -----	0.06
3-840-924	Chassis, main -----	0.35
3-840-925	Chassis, sub -----	0.08
3-840-929	Drum, band selector -----	0.03
3-840-930	Boss, band selector drum -----	0.06
3-840-933	Drum, dial cord -----	0.03
3-840-934	- discarded -	
3-840-935	Carrying Handle -----	0.10
3-840-936	Lever, switch -----	0.03
3-840-940	Holder, bar antenna -----	0.03
3-840-946	Side Plate, carrying handle -----	0.29
3-840-947	Spacer, carrying handle -----	0.01
3-840-948	Click Plate, carrying handle -----	0.01
3-840-949	Holder, steel ball; carrying handle -----	0.01
3-840-950	Retainer, squelch control -----	0.01
3-840-951	Holder, tuning capacitor -----	0.01
3-840-952	Shaft, tuning -----	0.09
3-840-953	Shaft, dial drum -----	0.05
3-840-955	- discarded -	
3-840-956	Ornamental Collar, carrying handle -----	0.06
3-840-957	Holder, switch lever -----	0.02
3-840-960	Spring, dial cord -----	0.02
3-840-962	Contact Spring, battery negative -----	0.03
3-840-964	Jack Plate -----	0.04
3-840-966	Spacer, jack plate -----	0.01
3-840-969	Label, band indicator -----	0.02
3-840-971	Heat Sink -----	0.05
3-840-972	Washer, carrying handle -----	0.01
3-840-975	Retainer, speaker -----	0.02
3-840-980	Cushion, tuning meter -----	0.01
3-840-981	Retainer, bearing -----	0.03
3-840-983	Spring, band selector drum -----	0.01
3-840-984	Insulator -----	0.03
3-821-536	Cushion, battery lid -----	0.01
3-836-033	Belt, retainer -----	0.24

General Export Model  
USA Model

2/13 (TFM-8600W)

(R8-140)

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
3-840-987	Cushion, lamp holder -----	\$0.02
3-840-992	Label, battery -----	0.03
3-837-695	Retainer, transistor -----	0.02

B. SCREWS, NUTS, WASHERS AND MISCELLANEOUS (Per 100)

7-621-255-15	Screw (+) P 2 x 3 -----	0.13/100
7-621-255-47	Screw (+) P 2 x 6 -----	0.59/100
7-621-259-25	Screw (+) P 2.6 x 4 -----	0.15/100
7-621-259-45	Screw (+) P 2.6 x 6 -----	0.10/100
7-621-303-01	Screw (-) F 1.7 x 4 -----	1.42/100
7-682-349-04	Screw (+) RK 3 x 10 -----	0.55/100
7-682-445-01	Screw (+) T 3 x 4 -----	0.25/100
7-685-104-01	Screw, tapping (+) P 2 x 6 -----	0.26/100
7-685-106-01	Screw, tapping (+) P 2 x 10 -----	0.26/100
7-685-145-21	Screw, tapping (+) P 3 x 6 -----	0.26/100
7-685-146-21	Screw, tapping (+) P 3 x 8 -----	0.25/100
7-685-148-24	Screw, tapping (+) P 3 x 12 -----	0.55/100
7-682-545-04	Screw (+) B 3 x 4 -----	0.31/100
7-623-105-01	Washer 2 $\phi$ (small) -----	0.06/100
7-623-105-15	Washer 2 $\phi$ (middle) -----	0.06/100
7-623-107-21	Washer 2.6 $\phi$ (large) -----	0.10/100
7-623-405-02	Lock Washer, ext tooth 2 $\phi$ -----	0.17/100
7-624-106-02	Retaining Ring E-2.5 $\phi$ -----	0.39/100
7-624-118-02	Retaining Ring E-3 $\phi$ -----	0.39/100
7-671-114-01	Steel Ball 4 $\phi$ -----	0.25/100
7-684-011	Nut 2 $\phi$ -----	0.48/100
7-684-034	Nut 4 $\phi$ -----	0.25/100
7-684-035	Nut 5 $\phi$ -----	0.26/100
7-625-108-61	Rivet 2 $\phi$ x 6 -----	0.15/100

Note:  $\phi$  indicates mm dia.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
<b>C. ELECTRICAL PARTS</b>			
<b>Mounted Circuit Boards</b>			
	8-981-410-11	Mounted Circuit Board, AIR front end -----	\$4.70
	8-981-410-15	Mounted Circuit Board, main circuit -----	22.95
	8-981-410-17	Mounted Circuit Board, AIR band pass filter --	0.50
<b>Semiconductors</b>			
Q101		Transistor, 2SK23 -----	0.42
Q102		Transistor, 2SC629 -----	0.25
Q103		Transistor, 2SC403A -----	0.14
Q201		Transistor, 2SC710 -----	0.12
Q202		Transistor, 2SC710 -----	0.12
Q203		Transistor, 2SC710 -----	0.12
Q204		Transistor, 2SC710 -----	0.12
Q205		Transistor, 2SC710 -----	0.12
Q206		Transistor, 2SC710 -----	0.12
Q207		Transistor, 2SC633A -----	0.14
Q208		Transistor, 2SD187 -----	0.18
Q209		Transistor, 2SC633A -----	0.14
Q210		Transistor, 2SC633A -----	0.14
Q211		Transistor, 2SB495 -----	0.18
Q212		Transistor, 2SB495 -----	0.18
Q213		Transistor, 2SC710 -----	0.12
Q214		Transistor, 2SC710 -----	0.12
Q215		Transistor, 2SC710 -----	0.12
Q216		Transistor, 2SB136 -----	0.12
Q217		Transistor, 2SB136 -----	0.12
Q218		Transistor, 2SC633A -----	0.14
Q301		Transistor, 2SC710 -----	0.12
Q302		Transistor, 2SC710 -----	0.12
D101		Diode, 1T240 -----	0.05
D201		Diode, 1T261 -----	0.05
D202		Diode, 1T261 -----	0.05
D203		Diode, 1T23 -----	0.05
D204		Diode, 1S1555 -----	0.07
D205		Diode, 1S1555 -----	0.07
D206		Diode, 1S1555 -----	0.07
D301		Diode, 1S1555 -----	0.07
D302		Diode, 1T261 -----	0.05
Th201	1-800-191-00	Thermistor, CS47 -----	0.04
Th202	1-800-192-00	Thermistor, CS120 -----	0.04

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
<u>Coils and Transformers</u>			
L001,002	1-401-462	Ant Coil, ferrite bar; mw/beacon -----	\$0.43
L101	1-425-526	Ant Coil,1, fm -----	0.05
L102	1-425-525	Ant Coil 2, fm -----	0.04
L103	1-425-525	Ant Coil 3, fm -----	0.04
L104	1-405-386	Osc Coil, fm -----	0.05
L105	1-407-186	4.7 $\mu$ H, micro inductor -----	0.04
L106	1-407-190	10 $\mu$ H, micro inductor -----	0.04
L201	1-405-330	Osc Coil, mw -----	0.14
L202	1-405-482	Osc Coil, beacon -----	0.10
L203	1-407-173	220 $\mu$ H, micro inductor -----	0.03
L204	1-407-167	68 $\mu$ H, micro inductor -----	0.03
L205	1-407-173	220 $\mu$ H, micro inductor -----	0.03
L206	1-407-173	220 $\mu$ H, micro inductor -----	0.03
L207	1-407-196	1.2 mH, micro inductor -----	0.05
L208	1-407-177	470 $\mu$ H, micro inductor-----	0.03
L209	1-421-006-14	Coil, choke -----	0.07
L301	1-401-383	Filter Coil, air ant-----	0.05
L302	1-425-533-13	Rf Coil, air -----	0.05
L303	1-407-178	1 $\mu$ H, micro inductor -----	0.04
L304	1-405-389	Osc Coil, air -----	0.02
L305	1-407-178	1 $\mu$ H, micro inductor -----	0.04
L401	1-401-484-00	BPF Coil, air -----	0.06
L402	1-401-484-00	BPF Coil, air -----	0.06
IFT F101	1-403-294	Transformer, fm i-f -----	0.13
IFT F1	1-403-244-31	Transformer, fm i-f -----	0.13
IFT F2	1-403-272-31	Transformer, fm discriminator -----	0.13
IFT F3	1-403-273-31	Transformer, fm discriminator -----	0.13
IFT A1	1-403-137	Transformer, a-m i-f -----	0.11
IFT AIR-1	1-403-242-31	Transformer, air i-f -----	0.14
IFT AIR-2	1-403-243-31	Transformer, air i-f -----	0.13
IFT AIR-3	1-403-244-31	Transformer, air i-f -----	0.13
IFT AIR-4	1-403-555	Transformer, air i-f -----	0.13
CF F-1	1-527-184-13	Ceramic Filter, fm i-f -----	0.12
CF F-2	1-527-184-13	Ceramic Filter, fm i-f -----	0.12
CF A-1	1-403-154	Ceramic Filter, a-m i-f -----	0.10
CFT	1-403-144	Ceramic Filter, a-m i-f -----	0.23
CF AIR-1	1-527-501-13	Ceramic Filter, air i-f -----	0.29
T201	1-423-072-21	Transformer, driver -----	0.17
T202	1-427-290	Transformer, output -----	0.28

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
<u>Capacitors</u>			
C101	1-101-861	15 pF	ceramic ----- \$0.02
C102	1-101-861	15 pF	ceramic ----- 0.02
C103	1-101-861	15 pF	ceramic ----- 0.02
C104	1-101-937	1 pF	ceramic ----- 0.03
C105	1-101-936	0.5 pF	ceramic ----- 0.03
C106	-	-	-
C107	1-101-072	0.01 μF	ceramic ----- 0.02
C108	1-102-714	10 pF	ceramic ----- 0.02
C109	1-102-121	0.002 μF	ceramic ----- 0.03
C110	1-102-864	5 pF	ceramic ----- 0.02
C111	1-102-090	0.0047 μF	ceramic ----- 0.02
C112	1-102-508	10 pF	ceramic ----- 0.03
C113	1-101-869	27 pF	ceramic ----- 0.02
C114	1-101-976	10 pF	ceramic ----- 0.02
C115	1-101-072	0.01 μF	ceramic ----- 0.02
C116	1-101-072	0.01 μF	ceramic ----- 0.02
C117	1-101-072	0.01 μF	ceramic ----- 0.02
C118	1-105-829-12	0.0047 μF	mylar ----- 0.02
C119	1-101-918	0.001 μF	ceramic ----- 0.02
C120	1-101-072	0.01 μF	ceramic ----- 0.02
C121	1-101-958	8 pF	ceramic ----- 0.02
C122	1-101-958	8 pF	ceramic ----- 0.02
C201	1-102-942	5 pF	ceramic ----- 0.02
C202	1-107-243	430 pF	silvered mica ----- 0.03
C203	1-102-943	6 pF	ceramic ----- 0.02
C204	1-107-231	360 pF	silvered mica ----- 0.02
C205	1-107-087	120 pF	silvered mica ----- 0.02
C206	1-102-949	12 pF	ceramic ----- 0.02
C207	1-102-963	33 pF	ceramic ----- 0.02
C208	1-105-839-12	0.033 μF	mylar ----- 0.02
C209	1-105-663-12	0.0015 μF	mylar ----- 0.02
C210	1-105-833-12	0.01 μF	mylar ----- 0.02
C211	1-105-837-12	0.022 μF	mylar ----- 0.02
C212	1-102-576	1.5 pF	ceramic ----- 0.02
C213	1-105-821-12	0.001 μF	mylar ----- 0.02
C214	1-101-923	0.01 μF	ceramic ----- 0.02
C215	1-105-833-12	0.01 μF	mylar ----- 0.02
C216	1-105-837-12	0.022 μF	mylar ----- 0.02
C217	1-105-833-12	0.01 μF	mylar ----- 0.02
C218	1-101-923	0.01 μF	ceramic ----- 0.02
C219	1-105-833-12	0.01 μF	mylar ----- 0.02

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
C220	1-107-138	200 pF	silvered mica ----- \$0.02
C221	1-105-833-12	0.01 $\mu$ F	mylar ----- 0.02
C222	1-101-919	0.0022 $\mu$ F	ceramic ----- 0.02
C223	1-105-837-12	0.022 $\mu$ F	mylar ----- 0.02
C224	1-102-939	2 pF	ceramic ----- 0.02
C225	1-101-924	0.022 $\mu$ F	ceramic ----- 0.02
C226	1-107-138	200 pF	silvered mica ----- 0.02
C227	1-105-837-12	0.022 $\mu$ F	mylar ----- 0.06
C228	1-101-923	0.01 $\mu$ F	ceramic ----- 0.02
C229	1-121-395	4.7 $\mu$ F/16 V	electrolytic ----- 0.07
C230	1-101-923	0.01 $\mu$ F	ceramic ----- 0.02
C231	1-121-413	100 $\mu$ F/10 V	electrolytic ----- 0.05
C232	1-101-923	0.01 $\mu$ F	ceramic ----- 0.02
C233	1-101-924	0.022 $\mu$ F	ceramic ----- 0.02
C234	1-105-837-12	0.022 $\mu$ F	mylar ----- 0.02
C235	1-105-833-12	0.01 $\mu$ F	mylar ----- 0.02
C236	1-102-939	2 pF	ceramic ----- 0.02
C237	1-105-833-12	0.01 $\mu$ F	mylar ----- 0.02
C238	1-101-924	0.02 $\mu$ F	ceramic ----- 0.02
C239	1-127-021	0.33 $\mu$ F/10 V	solid aluminum ----- 0.06
C240	1-107-138	200 pF	silvered mica ----- 0.02
C241	1-107-255-11	Encapsulated Component 200 P x 2	----- 0.02
C242	-	-	-
C243	1-121-469	10 $\mu$ F/10 V	electrolytic ----- 0.03
C244	1-127-021	0.33 $\mu$ F/10 V	solid aluminum ----- 0.06
C245	1-105-837-12	0.0015 $\mu$ F	mylar ----- 0.02
C246	1-127-019	0.1 $\mu$ F/10 V	solid aluminum ----- 0.06
C247	1-107-138	200 pF	silvered mica ----- 0.02
C248	1-121-469	10 $\mu$ F/10 V	electrolytic ----- 0.03
C249	1-121-420	220 $\mu$ F/10 V	electrolytic ----- 0.07
C250	1-127-019	0.1 $\mu$ F/10 V	solid aluminum ----- 0.06
C251	1-105-841-12	0.047 $\mu$ F	mylar ----- 0.02
C252	1-121-420	220 $\mu$ F/10 V	electrolytic ----- 0.07
C253	1-105-849-12	0.22 $\mu$ F	mylar ----- 0.02
C254	1-121-391	1 $\mu$ F/50 V	electrolytic ----- 0.03
C255	1-121-391	1 $\mu$ F/50 V	electrolytic ----- 0.03
C256	1-121-413	100 $\mu$ F/6.3 V	electrolytic ----- 0.05
C257	1-121-420	220 $\mu$ F/10 V	electrolytic ----- 0.07
C258	1-121-425	470 $\mu$ F/10 V	electrolytic ----- 0.12
C259	1-102-975	100 pF	ceramic ----- 0.02
C260	1-102-975	100 pF	ceramic ----- 0.02
C261	1-101-922	0.0047 $\mu$ F	ceramic ----- 0.02
C262	1-105-833-12	0.01 $\mu$ F	mylar ----- 0.02
C263	1-101-923	0.01 $\mu$ F	ceramic ----- 0.02

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
C264	1-105-833-12	0.01 $\mu$ F	mylar ----- \$0.02
C265	1-105-833-12	0.01 $\mu$ F	mylar ----- 0.02
C266	1-121-469	10 $\mu$ F/10 V	electrolytic ----- 0.03
C267	1-101-923	0.01 $\mu$ F	ceramic ----- 0.02
C268	1-121-469	10 $\mu$ F/10 V	electrolytic ----- 0.03
C269	1-105-833-12	0.01 $\mu$ F	mylar ----- 0.02
C270	1-101-924	0.022 $\mu$ F	ceramic ----- 0.02
C271	1-101-837	0.5 pF	ceramic ----- 0.02
C272	1-127-019	0.1 $\mu$ F/10 V	solid aluminum ----- 0.06
C273	1-105-833-12	0.01 $\mu$ F	mylar ----- 0.02
C274	1-105-843-12	0.068 $\mu$ F	mylar ----- 0.02
C275	1-127-019	0.1 $\mu$ F/10 V	solid aluminum ----- 0.06
C276	1-101-923	0.01 $\mu$ F	ceramic ----- 0.02
C277	1-105-833-12	0.01 $\mu$ F	mylar ----- 0.02
C278	1-102-975	100 pF	ceramic ----- 0.02
C279	1-121-413	100 $\mu$ F/10 V	electrolytic ----- 0.05
C280	1-127-019	0.1 $\mu$ F/10 V	solid aluminum ----- 0.06
C281	1-105-841-12	0.047 $\mu$ F	mylar ----- 0.02
C282	1-105-839-12	0.033 $\mu$ F	mylar ----- 0.02
C283	1-105-663-12	0.0015 $\mu$ F	mylar ----- 0.02
C284	1-101-923	0.01 $\mu$ F	ceramic ----- 0.02
C285	1-121-413	100 $\mu$ F/6.3 V	electrolytic ----- 0.05
C286	1-102-973	1000 pF	ceramic ----- 0.02
C287	1-102-973	100 pF	ceramic ----- 0.02
C288	1-102-973	100 pF	ceramic ----- 0.02
C289	1-105-825-12	0.0022 $\mu$ F	mylar ----- 0.02
C290	1-105-833-12	0.01 $\mu$ F	mylar ----- 0.02
C291	1-107-137	150 pF	silvered mica ----- 0.02
C292	1-101-919	0.0022 $\mu$ F	ceramic ----- 0.02
C301	1-102-958	20 pF	ceramic ----- 0.02
C302	1-102-880	47 pF	ceramic ----- 0.03
C303	1-102-939	2 pF	ceramic ----- 0.03
C304	1-102-958	20 pF	ceramic ----- 0.02
C305	1-102-951	15 pF	ceramic ----- 0.02
C306	1-101-919	0.0022 $\mu$ F	ceramic ----- 0.02
C307	1-102-951	15 pF	ceramic ----- 0.02
C308	1-141-097-21	Capacitor, trimmer	----- 0.05
C309	1-101-919	0.0022 $\mu$ F	ceramic ----- 0.02
C310	1-102-940	3 pF	ceramic ----- 0.02
C311	1-107-138-11	200 pF	silvered mica ----- 0.02
C312	1-102-958	20 pF	ceramic ----- 0.02
C313	1-101-997	5 pF	ceramic ----- 0.03
C314	1-101-923	0.01 $\mu$ F	ceramic ----- 0.02
C315	1-102-940	3 pF	ceramic ----- 0.02
C292	1-101-919	0.0022 $\mu$ F	ceramic ----- 0.02
C293	1-101-919	0.0022 $\mu$ F	ceramic ----- 0.02

8/13 (TFM-8600W)

General Export Model  
USA Model

(R8-140)

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
C316		1-141-097-21	Capacitor, trimmer -----	\$0.05
C317		1-102-749	12 pF ceramic -----	0.03
C318		1-105-823-12	0.0015 $\mu$ F mylar -----	0.02
C319		1-101-919	0.0022 $\mu$ F ceramic -----	0.02
C320		1-101-923	0.01 $\mu$ F ceramic -----	0.02
C401		1-102-947	10 pF ceramic -----	0.02
C402		1-102-959	22 pF ceramic -----	0.02
C403		1-102-962	30 pF ceramic -----	0.02
C404		1-102-941	4 pF ceramic -----	0.02
C405		1-102-961	27 pF ceramic -----	0.02
C406		1-102-958	20 pF ceramic -----	0.02
C407		1-102-949	12 pF ceramic -----	0.02
C1-1 - 1-8		1-151-223-12	Capacitor, fm tuning -----	0.72
C2-1 - 3-2		1-151-196	Capacitor, a-m tuning -----	1.09
C3-1 - 3-2		1-141-011	Capacitor, trimmer 2 gang -----	0.07
C4-1 - 4-2		1-141-011	Capacitor, trimmer 2 gang -----	0.07

Resistors (All resistors are 1/4 W,  $\pm 5\%$ ,)  
carbon type resistors.

R101	1-208-027	560 $\Omega$ 1/16 W ceramic -----	0.02
R102	1-208-027	560 $\Omega$ 1/16 W ceramic -----	0.02
R103	1-244-697	10 k $\Omega$ -----	0.02
R104	1-244-697	10 k $\Omega$ -----	0.02
R105	1-208-045	3.3 k $\Omega$ 1/16 W ceramic -----	0.02
R106	1-208-145	100 k $\Omega$ 1/16 W ceramic -----	0.02
R107	1-208-145	100 k $\Omega$ 1/16 W ceramic -----	0.02
R108	1-208-088	200 k $\Omega$ 1/16 W ceramic -----	0.02
R109	1-208-027	560 $\Omega$ 1/16 W ceramic -----	0.02
R110	1-208-033	1 k $\Omega$ 1/16 W ceramic -----	0.02
R201	1-242-657	220 $\Omega$ -----	0.02
R202	1-242-676	1.3 k $\Omega$ -----	0.02
R203	1-242-663	390 $\Omega$ -----	0.02
R204	1-244-673	1 k $\Omega$ -----	0.02
R205	1-242-687	3.9 k $\Omega$ -----	0.02
R206	1-242-689	4.7 k $\Omega$ -----	0.02
R207	1-242-661	330 $\Omega$ -----	0.02
R208	1-242-649	100 $\Omega$ -----	0.02
R209	1-242-699	12 k $\Omega$ -----	0.02
R210	1-242-670	750 $\Omega$ -----	0.02
R211	1-242-667	560 $\Omega$ -----	0.02
R212	1-242-667	560 $\Omega$ -----	0.02
R213	1-244-665	470 $\Omega$ -----	0.02
R214	1-242-690	5.1 k $\Omega$ -----	0.02
R215	1-242-656	200 $\Omega$ -----	0.02
R216	1-242-673	1 k $\Omega$ -----	0.02

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
R217		1-244-724	130 kΩ -----	\$0.02
		1-244-720	91 kΩ -----	\$0.02
		(1-244-721	100 kΩ -----	0.02
*R218		(1-244-723	120 kΩ -----	0.02
		(1-244-724	130 kΩ -----	0.02
		(1-244-725	150 kΩ -----	0.02
R219		1-244-714	51 kΩ -----	0.02
R220		1-242-661	330 Ω -----	0.02
R221		1-244-689	4.7 kΩ -----	0.02
R222		1-242-656	200 Ω -----	0.02
R223		1-244-673	1 kΩ -----	0.02
R224		1-244-649	100 Ω -----	0.02
R225		1-244-720	91 kΩ -----	0.02
R226		1-242-670	750 Ω -----	0.02
R227		1-244-656	200 Ω -----	0.02
R228		1-242-661	330 Ω -----	0.02
R229		1-242-691	5.6 kΩ -----	0.02
R230		1-244-709	33 kΩ -----	0.02
R231		1-244-694	7.5 kΩ -----	0.02
R232		1-242-640	100 Ω -----	0.02
R233		1-244-724	130 kΩ -----	0.02
R234		1-244-684	3 kΩ -----	0.02
R235		1-244-681	2.2 kΩ -----	0.02
R236		1-244-697	10 kΩ -----	0.02
R237		1-244-684	3 kΩ -----	0.02
R238		1-244-665	470 Ω -----	0.02
R239		1-242-660	300 Ω -----	0.02
R240		1-242-673	1 kΩ -----	0.02
R241		1-242-673	1 kΩ -----	0.02
R242		1-242-703	18 kΩ -----	0.02
R243		1-242-691	5.6 kΩ -----	0.02
R244		1-244-673	1 kΩ -----	0.02
R245		1-244-721	100 kΩ -----	0.02
R246		1-244-673	1 kΩ -----	0.02
R247		1-242-684	3 kΩ -----	0.02
		(1-242-653	150 Ω -----	0.02
		(1-242-655	180 Ω -----	0.02
*R248		(1-242-656	200 Ω -----	0.02
		(1-242-657	220 Ω -----	0.02
		(1-242-659	270 Ω -----	0.02
R249		1-242-673	1 kΩ -----	0.02
R250		1-242-701	15 kΩ -----	0.02
R251		1-242-717	68 kΩ -----	0.02

\* Mark to be selected.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
R252	1-242-712	43 kΩ -----	\$ 0.02
R253	1-242-673	1 kΩ -----	0.02
R254	1-244-649	100 Ω -----	0.02
R255	1-242-715	56 kΩ -----	0.02
R256	1-242-637	33 Ω -----	0.02
R257	1-242-680	2 kΩ -----	0.02
R258	1-242-709	33 kΩ -----	0.02
R259	1-242-637	33 Ω -----	0.02
R260	1-242-656	200 Ω -----	0.02
R261	1-242-680	2 kΩ -----	0.02
R262	1-242-667	560 Ω -----	0.02
R263	1-242-642	51 Ω -----	0.02
R264	1-242-680	2 kΩ -----	0.02
R265	1-242-607	1.8 Ω -----	0.02
R266	1-242-660	300 Ω -----	0.02
R267	1-242-661	330 Ω -----	0.02
R268	1-242-656	200 Ω -----	0.02
R269	1-242-649	100 Ω -----	0.02
R270	1-242-697	10 kΩ -----	0.02
R271	1-242-649	100 Ω -----	0.02
R272	1-242-660	300 Ω -----	0.02
R273	1-242-649	100 Ω -----	0.02
R274	1-242-697	10 kΩ -----	0.02
R275	1-242-658	240 Ω -----	0.02
R276	1-242-649	100 Ω -----	0.02
R277	1-242-719	82 kΩ -----	0.02
R278	1-242-649	100 Ω -----	0.02
R279	1-242-649	100 Ω -----	0.02
R280	1-240-697	10 kΩ -----	0.02
R281	1-242-670	750 Ω -----	0.02
R282	1-244-714	51 kΩ -----	0.02
R283	1-242-684	3 kΩ -----	0.02
R284	1-244-671	820 Ω -----	0.02
R285	1-242-653	150 Ω -----	0.02
R286	1-242-687	3.9 kΩ -----	0.02
R287	1-242-697	10 kΩ -----	0.02
R288	1-242-701	15 kΩ -----	0.02
R289	1-242-682	2.4 kΩ -----	0.02
R290	1-242-686	3.6 kΩ -----	0.02
R291	1-242-701	15 kΩ -----	0.02
R292	1-242-697	10 kΩ -----	0.02
R293	1-242-693	6.8 kΩ -----	0.02
R294	1-242-707	24 kΩ -----	0.02
R295	1-242-653	150 Ω -----	0.02

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
R296		1-242-725	150 kΩ -----	\$0.02
R297		-	-	-
R298		1-242-690	5.1 kΩ -----	0.02
R299		1-244-649	100 Ω -----	0.02
R2101		1-242-697	10 kΩ -----	0.02
R2102		1-242-673	1 kΩ -----	0.02
R2103		1-244-684	3 kΩ -----	0.02
R2100		1-244-667	560 Ω -----	0.02
R301		1-242-649	100 Ω -----	0.02
R302		1-242-641	47 Ω -----	0.02
R303		1-242-661	330 Ω -----	0.02
R304		1-242-666	510 Ω -----	0.02
R305		1-242-639	39 Ω -----	0.02
R306		1-242-675	1.2 kΩ -----	0.02
R307		1-242-659	270 Ω -----	0.02
R308		1-242-673	1 kΩ -----	0.02
R309		1-242-697	10 kΩ -----	0.02
RV1		1-222-125	Variable Resistor 50 kΩ (C), squelch control-	0.20
RV2		1-222-531	Variable Resistor 10 kΩ (A), volume control--	0.14
RV3		1-222-532	Variable Resistor 50 kΩ (A), tone control---	0.14

#### Miscellaneous

TEL ANT	1-501-043-15	Antenna, telescopic -----	0.72
SP	1-502-312	Speaker -----	0.51
J001-003	1-507-332-12	3-Unit Jack, earphone/rec out/EXT POWER IN --	0.31
S1	1-514-894	Slide Rotary Switch, band selector -----	0.75
S2	1-514-453-21	Slide Switch, band selector -----	0.23
S3	1-514-729-41	Slide Switch, AFC -----	0.13
S4		- discarded -	-
S5	1-514-422	Leaf Switch, battery check -----	0.29
S6	1-514-895	Leaf Switch, light -----	0.08
S7	1-514-898	Switch, power -----	0.28
TM	1-520-076-13	Meter, tuning -----	0.92
PL	1-518-006-01	Pilot Lamp -----	0.11
	1-538-793-12	Printed Circuit Board, fm front end -----	0.05
	1-581-207-11	Printed Circuit Board, air -----	0.17
	1-581-206-12	Printed Circuit Board, main circuit -----	0.29
	8-981-410-10	Fm Front End Ass'y -----	4.90
	1-506-108-31	Pin, antenna terminal -----	0.01
	1-591-004-11	Printed Circuit Board, air bandpass filter --	0.05

General Export Model  
USA Model

12/13 (TFM-8600W)

(R8-140)

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
<b>D. ATTACHED ITEMS</b>		
3-995-590	Instruction Manual -----	\$
2-060-804-03	Shoulder Strap -----	0.71
3-822-524-01	Caution Label for Battery -----	0.01
3-835-810	Case, earphone -----	0.09
1-463-801-13	Ac Adaptor, AC-70W (USA Model only)-----	1.97
1-504-034-12	Earphone ME-20 -----	0.17
1-528-001-11	Battery, size "D" (USA Model only)-----	
3-840-976	Packing Carton -----	0.21
3-840-978	Cushion -----	0.16
3-701-251	Polyethylene Bag -----	0.01